KIT 1300N

SPECIFICATIONS


Power : 1300/650 W
Type: Three-way
Frequency Response: 45 - 18,000 Hz.
Sensitivity: 109 dB/W/m
Angle of coverage: 90^0 horiz. 40^0 vert.
Max. Sound Pressure Level : 138 dB SPL
Crossover Frequency: (18 dB/oct)
LF: 35 Hz
MID: 250 Hz
HF: 1.5 kHz
Low power: 400/800
Mid power: 150/300
High power: 100/250
Impedance LF: 4 ohms
Impedance MID: 8 ohms
Impedance HF: 8 ohms


SPEAKERS AND CROSSOVERS USED

Low section: 2L 15/554K
Medium section: L 12P110K
High section: N 980 2"
Horn: H 6040
Crossover: FR 1300 Active or Passive

ENCLOSURE CONSTRUCTION

- 1 Low Section
- 1 Mid/High Section

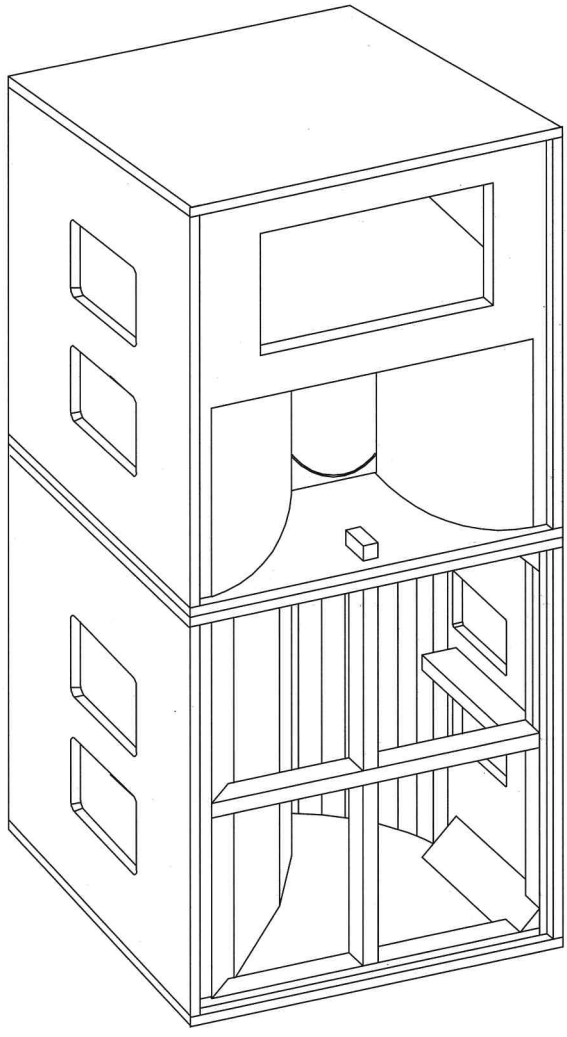

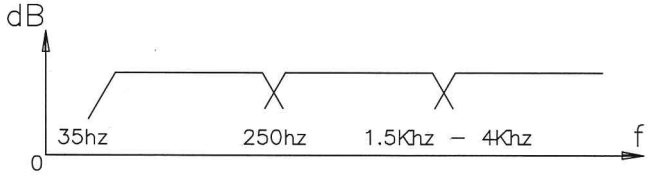

RCF Sound Systems