TR3 (FET)
K3496 D

CS-M02

DIN
(1) (one)
(4) (vert) IN
(2) blue
(5) (Range)
(3) blame OUT

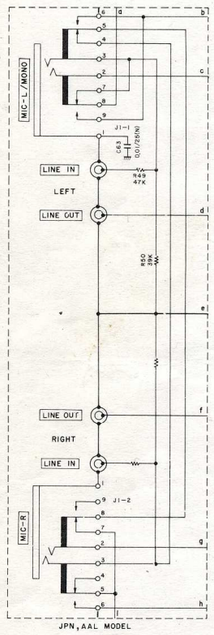

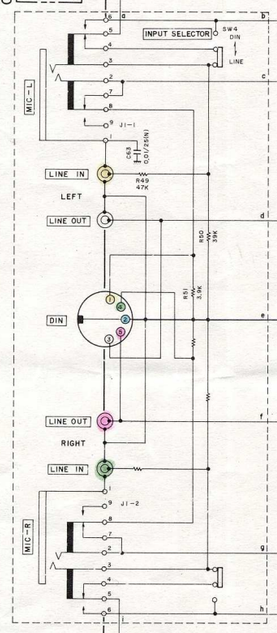

※ REC MODE

		NORMAL	CrO2	METAL
TR10	B	6.9V	11.4V	17.1V
	E	6.3V	10.8V *	16.6V
TR7,8	E	0.1V	0.1V	0.1V
T1	1 to 3	0.2V	−0.1V	−0.6V
	4 to 6	5.8V	10.2V	15.9V
	8	29.9VAC	54.2VAC	84.9VAC
	9	53.7VAC	97.2VAC	142.1VAC

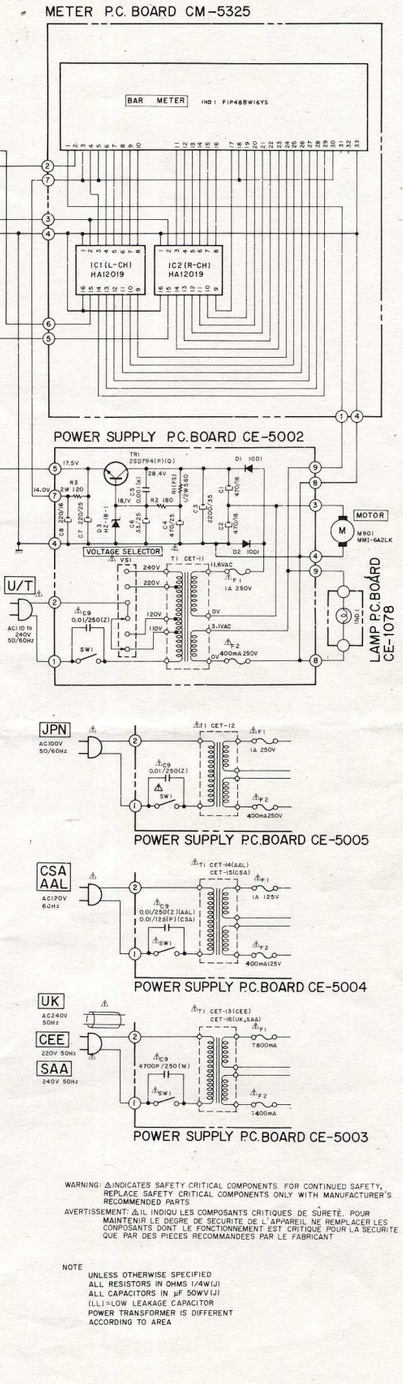



PRE AMP P.C. BOARD CE-5001A

WARNING: △INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: △IL INDIQU LES COMPOSANTS CRITIQUES DE SÛRETÉ. POUR MAINTENIR LE DEGRÉ DE SECURITÉ DE L' APPAREIL NE REMPLACER LES CONPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITÉ QUE PAR DES PIECES RECOMMANDEES PAR LE FABRICANT

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS (1/4W(J))
ALL CAPACITORS IN μF 50WV(J)
(LL)=LOW LEAKAGE CAPACITOR
POWER TRANSFORMER IS DIFFERENT ACCORDING TO AREA

0010750

CS-M02
SCHEMATIC DIAGRAM
No. 1600216A