


ULTRA OCTAVER UO300

3-Mode Octaver Effects Pedal

Thank you for showing your confidence in us by purchasing the BEHRINGER ULTRA OCTAVER UO300. This high-quality effects pedal creates a monster sound by adding two additional tones using your guitar—one and two octaves below the original tone. Thanks to its high-performance features you'll get natural, clear octave sounds with constant pitch, even for staccato playing.

Octave effect is possible due to a circuitry that generates signals one or more octaves below the input signal.

1. Controls

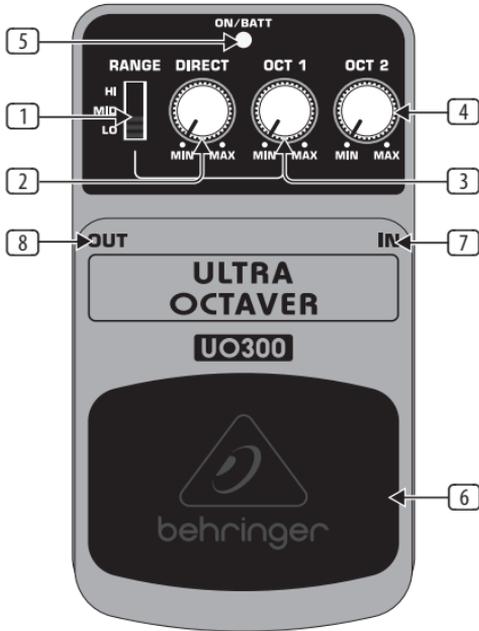

- 1 The **RANGE** selector allows you to optimize the effects pedal for HIGH, MID and LOW frequencies and use instruments with different frequency ranges (guitar, bass guitar, keyboard, etc.)
- 2 The **DIRECT** control adjusts the level of the original input signal.
- 3 The **OCT 1** control adjusts the level of the generated signal one octave below the original signal.
- 4 The **OCT 2** control adjusts the level of the generated signal two octaves below the original signal.
- 5 The blue **ON/BATT** LED illuminates when the effect is activated. It also serves as a battery level indicator.
- 6 Use the footswitch to activate/deactivate the effect.
- 7 Use this ¼" TS **IN** connector to plug in the instrument cable.
- 8 The ¼" TS **OUT** connector sends the signal to your amp.

Use the **DC IN** connection at the front of the unit to plug in a 9 V power supply (not included).

The **BATTERY COMPARTMENT** is located underneath the pedal cover. To install or replace the 9 V battery, press the hinges with a ballpen and remove the pedal cover. Be careful not to scratch the unit.

♦ **The UO300 has no on/off switch. As soon as you insert the jack into the in connector, the UO300 begins running. When not using the UO300, remove the jack from the in connector. This extends the life of the battery.**

The **SERIAL NUMBER** is located at the bottom.

2. Safety Instructions

Do not use near water, or install near heat sources. Use only authorized attachments/accessories. Do not service product yourself. Contact our qualified servicing personnel for servicing or repairs, especially when power supply cord or plug is damaged.

3. Warranty

Please register your new BEHRINGER equipment right after your purchase by visiting <http://behringer.com> and read the terms and conditions of our warranty carefully.

4. Specifications

In

Connector	¼" TS
Impedance	500 kΩ

Out

Connector	¼" TS
Impedance	1 kΩ

Power Supply

9 V $\overline{\sim}$, 100 mA regulated

BEHRINGER PSU-SB

USA/Canada	120 V \sim , 60 Hz
China/Korea	220 V \sim , 50 Hz
U.K./Australia	240 V \sim , 50 Hz
Europe	230 V \sim , 50 Hz
Japan	100 V \sim , 50 - 60 Hz
Power connector	2 mm DC jack, negative center
Battery	9 V type 6LR61
Power consumption	30 mA

Physical/Weight

Dimensions (H x W x D)	approx. 54 x 70 x 123 mm (2.1 x 2.8 x 4.8")
Weight	approx. 0.33 kg (0.7 lbs)

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may therefore differ from those listed or shown.

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, TURBOSOUND, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd. © MUSIC Group IP Ltd. 2015 All rights reserved.

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION



BEHRINGER

ULTRA OCTAVER UO300

Responsible Party Name: **MUSIC Group Services NV Inc.**

Address: **5270 Procyon Street
Las Vegas, NV 89118
USA**

Phone Number: **+1 702 800 8290**

ULTRA OCTAVER UO300

complies with the FCC rules as mentioned in the following paragraph:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Important information:

Changes or modifications to the equipment not expressly approved by MUSIC Group can void the user's authority to use the equipment.

