II. Sy80/48 DSP daughter card installation

A. ESD precautions installation

Before any DSP manipulation, it is strongly recommended to install an anti Electrostatic discharge surface under the module.

Package used for the shipment of this upgrade kit can be used for that.

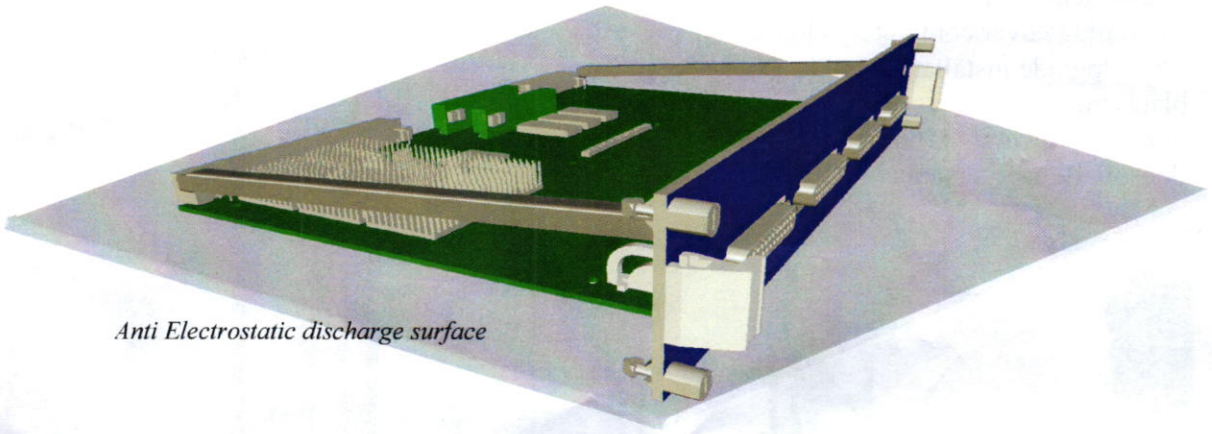

Anti Electrostatic discharge surface

B. Disassembly the DSP front face

B.1. remove the DSP front face

The DSP front is maintain with 8 dB25 screw locks (1) and 2 screws (2)

Screws location :

