## 1 remove the dB25 screw lock

For this action, the InnovaSON tool (d) must be used. In fact this tools maintain the nut while unscrewing the screw lock of dB25 connector.

The screw lock could be unscrew only when the tool (d) is inserted between the dB25 socket and the screw lock nut.

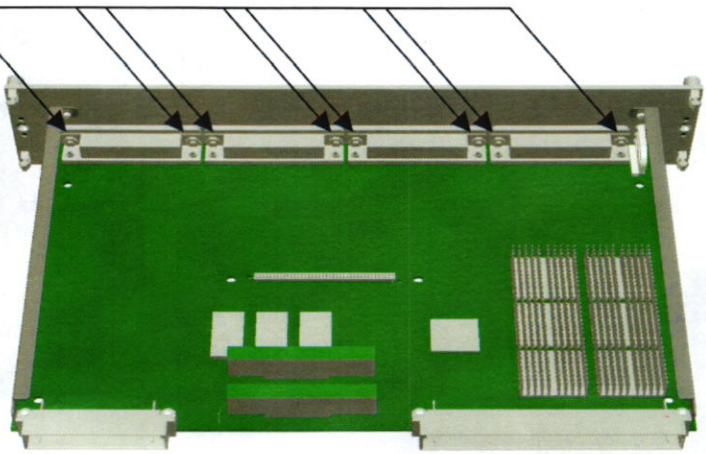

To avoid any damaged on the DSP, please use only the nut screwdriver (h) described in section I.B

⚠ Do not use a ratchet screw driver (too much strength applied on screw lock)

Install the tool (d) to maintain the nut

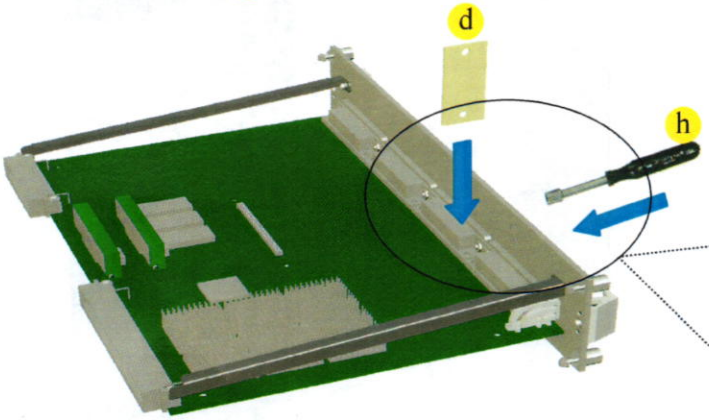


Strongly maintain the tools (d) and remove screw lock

