D. Re assembly the DSP front face

- The DSP front face mounting

The new DSP front face (c) is screwed to the DSP board with the 8 screw lock.

Each thread of screw lock must be glued with a small blob of the special glue provide in this upgrade kit (see (i))

(i)



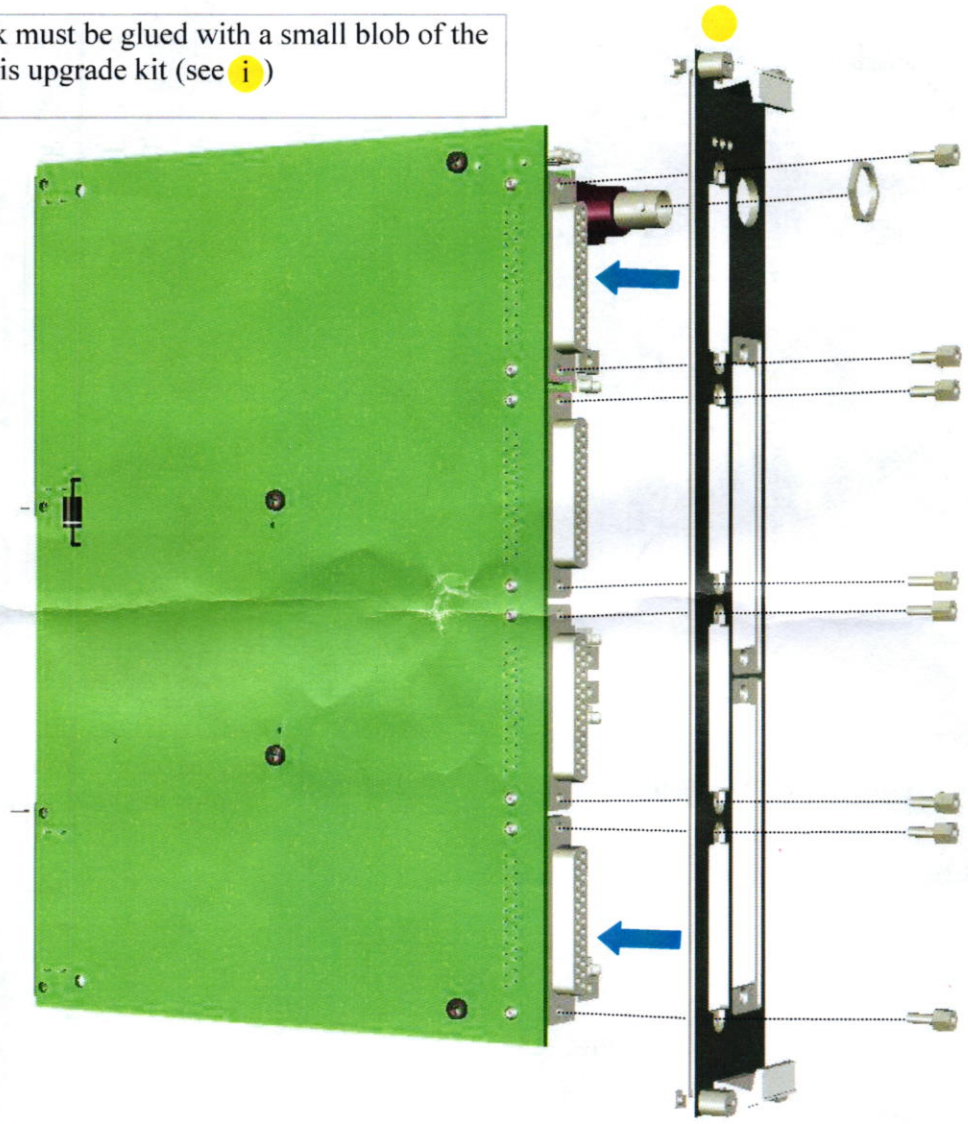

- You can re-use the 2 Aluminium profile handles to put on the new front face

