REDSOUND

#playdifferent

ELIS.8

FR/FR System

"All that You need"



Dedicated to Alice

www.redsounditalia.com


REDSOUND


#playdifferent

Input and Output Connection


R

L

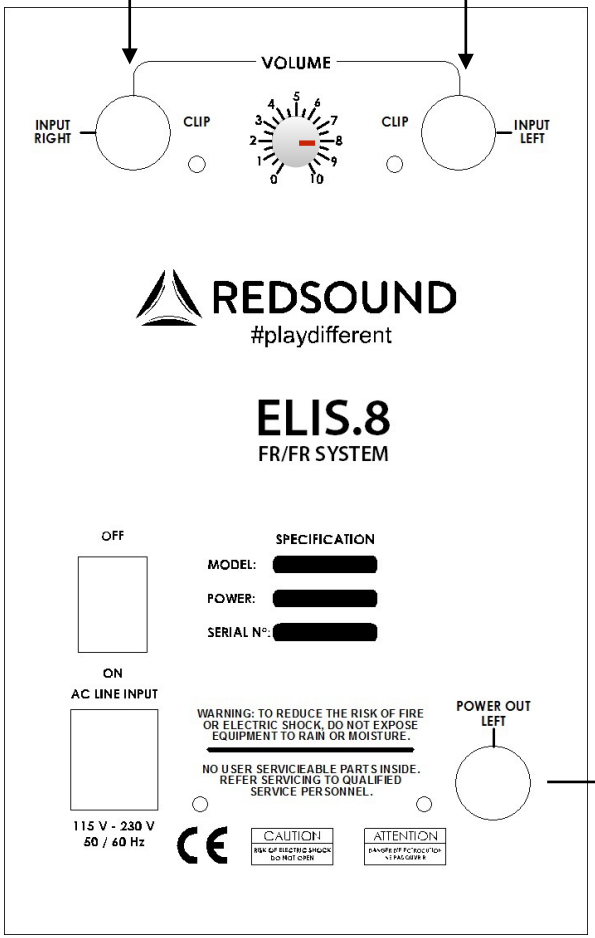

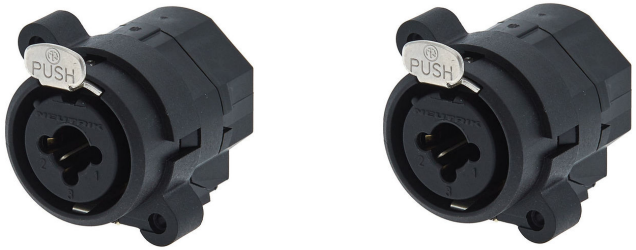

2xBalanced Input with TRS or XLR Female connectors

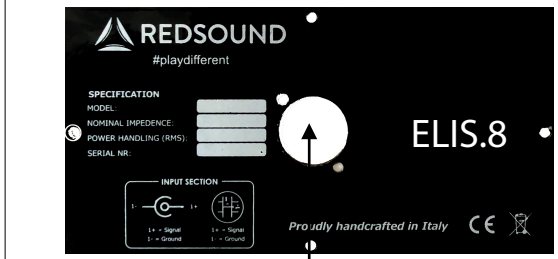



2xOutput with TS or Speakon connectors



Main Right Cabinet

****We advise to connect with RED SOUND Power cable 3m***

Left Passive Cabinet


REDSOUND

#playdifferent

Stereo Configuration Connection

R

L

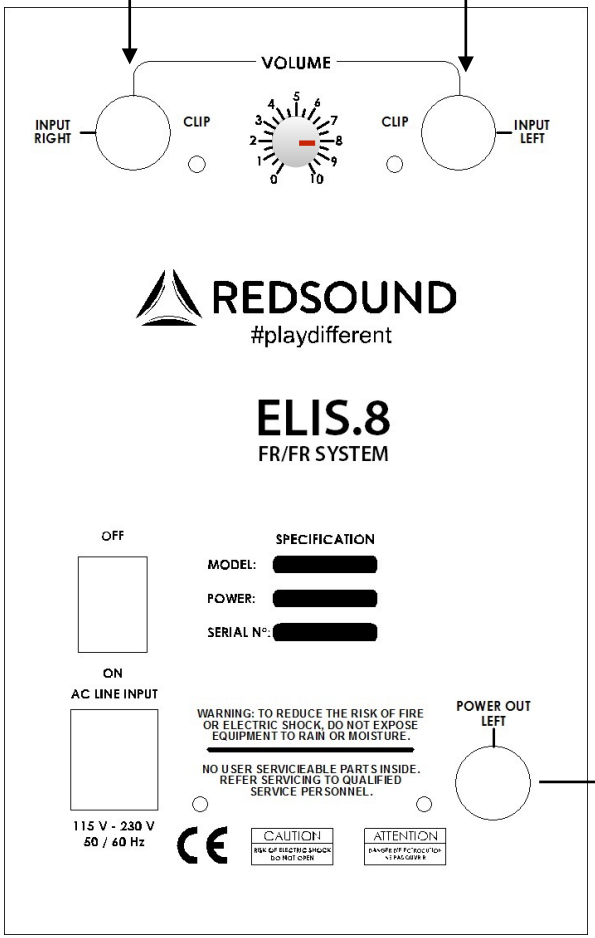




Sound Card

or

Digital System



*RED SOUND Connect - Power Cable**

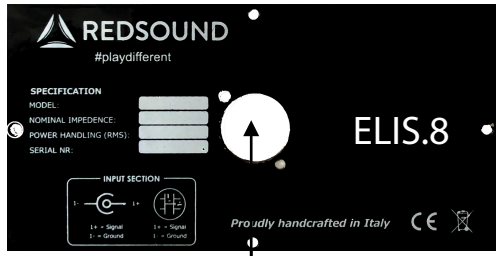


Main Right Cabinet

Left Passive Cabinet

REDSOUND

#playdifferent

Volume Control

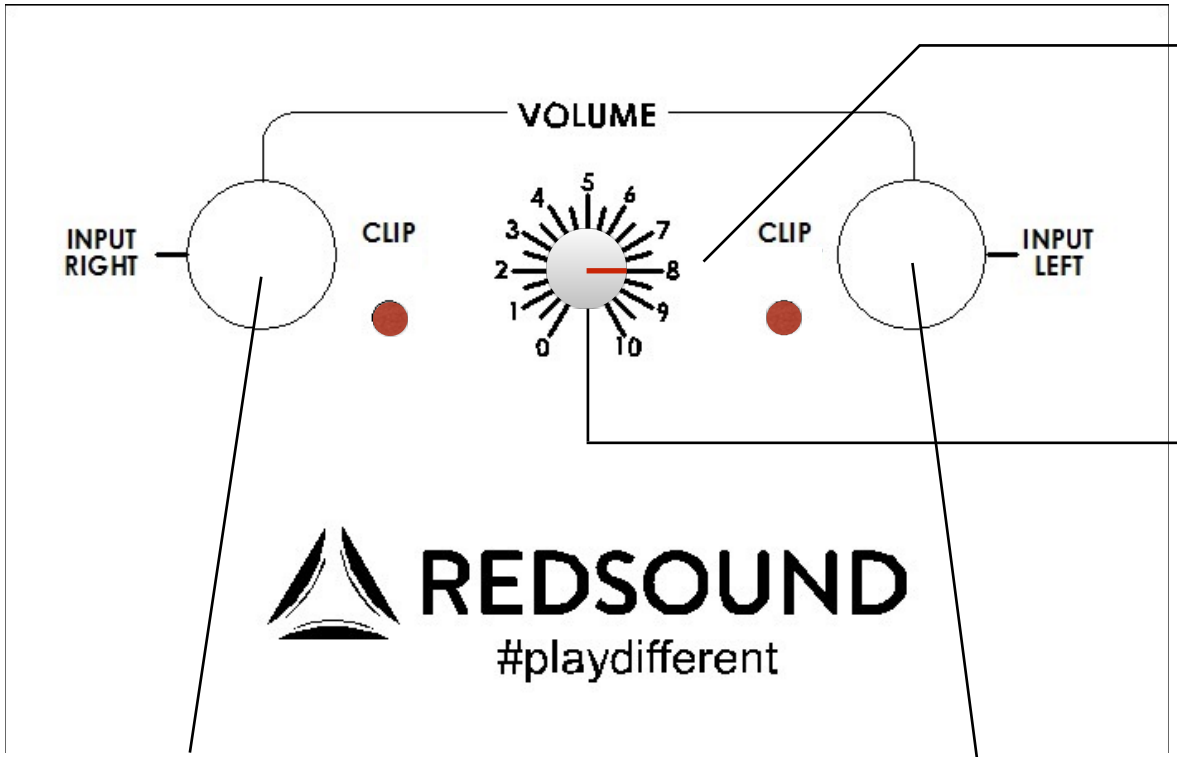

Recommended Volume

Only potentiometer that control the volume of each Channels

ELIS.8

FR/FR SYSTEM



Active Cabinet




Passive Cabinet

REDSOUND

#playdifferent

Led Clip Control

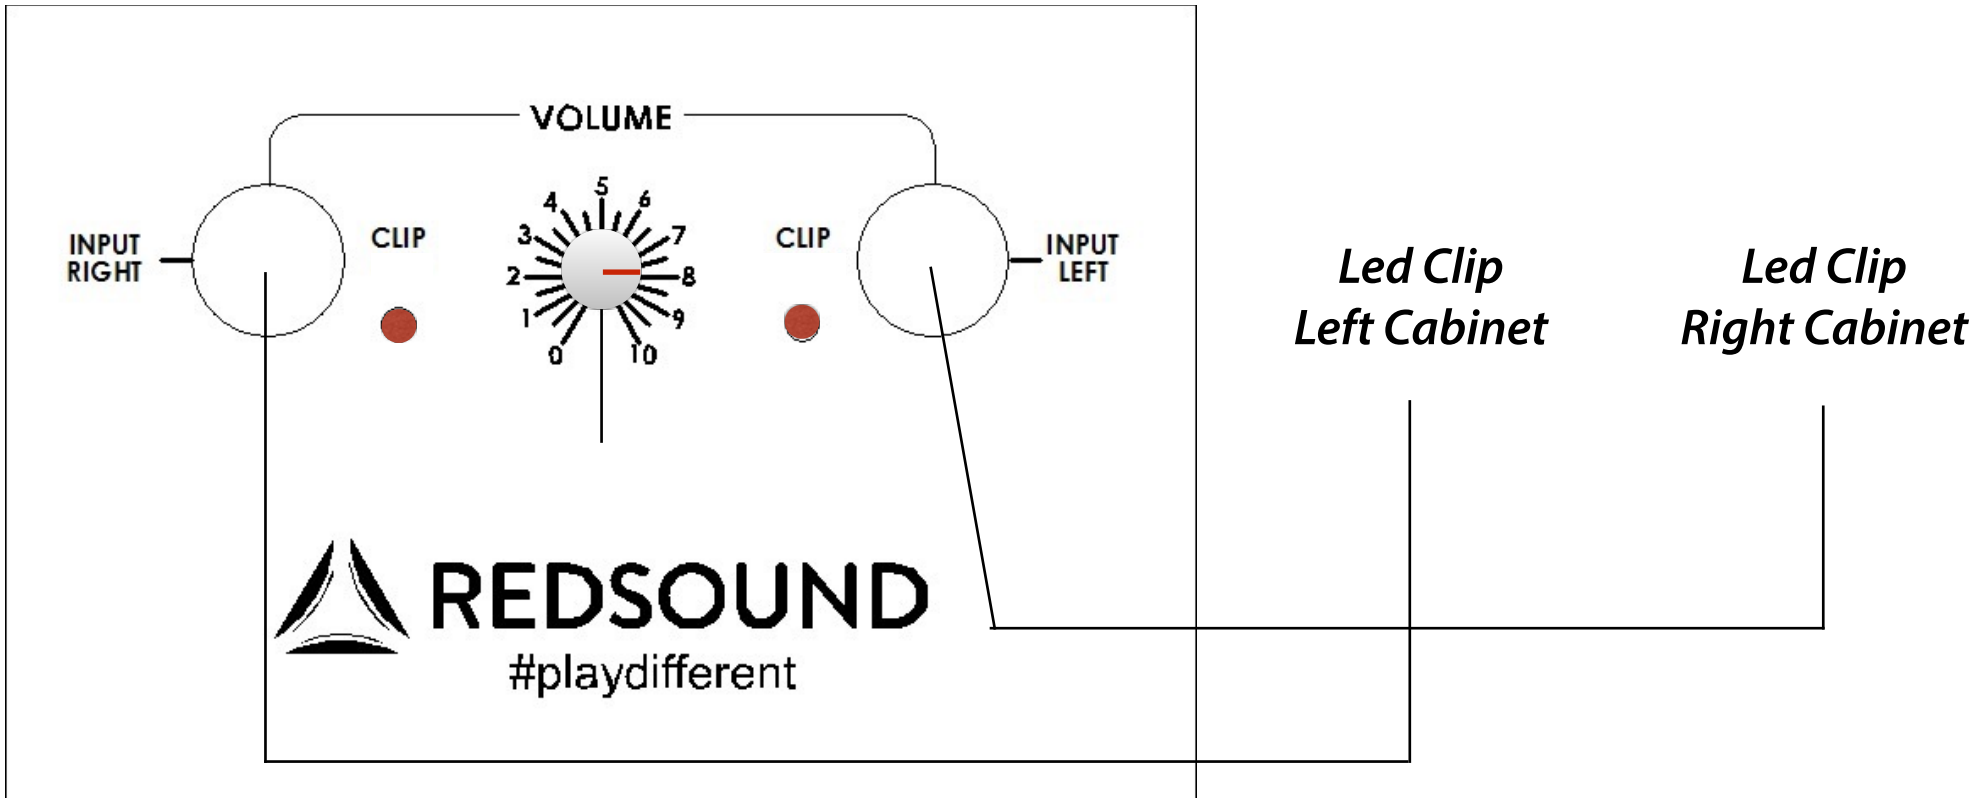

First step: When you switch On Power, both Led are active and lights are RED.
After three second will be off and you can start play.

WARNING: During your session, if the led are ON (Red light), we advise to reduce the gain volume from you digital system or pre-amp.

REDSOUND


#playdifferent

Custom Woofer

ELIS.8 is equipped with
RED SOUND custom woofer
manufactured by

SICA loudspeakers ®


with coaxial driver technology

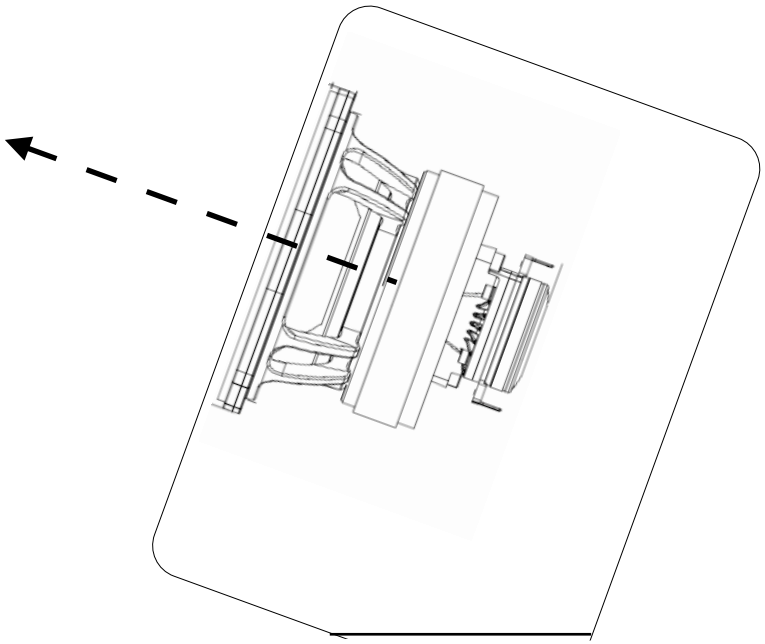


REDSOUND

#playdifferent

Coaxial Driver Technology

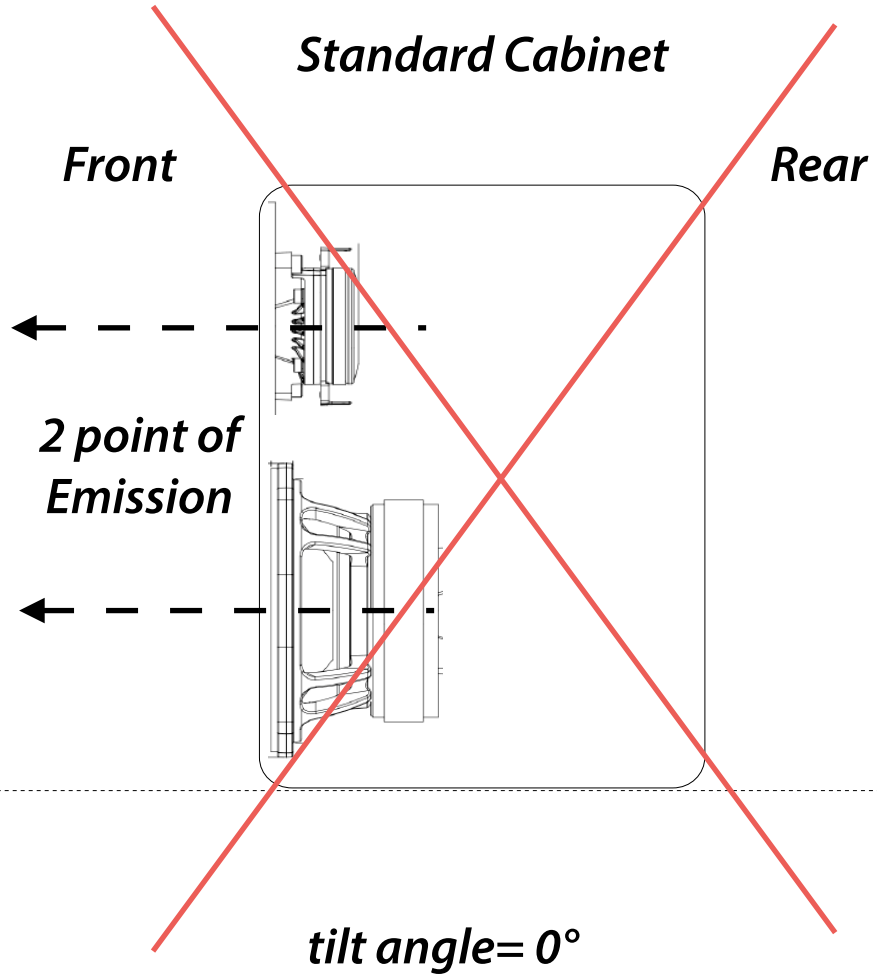

tilt angle= 0°

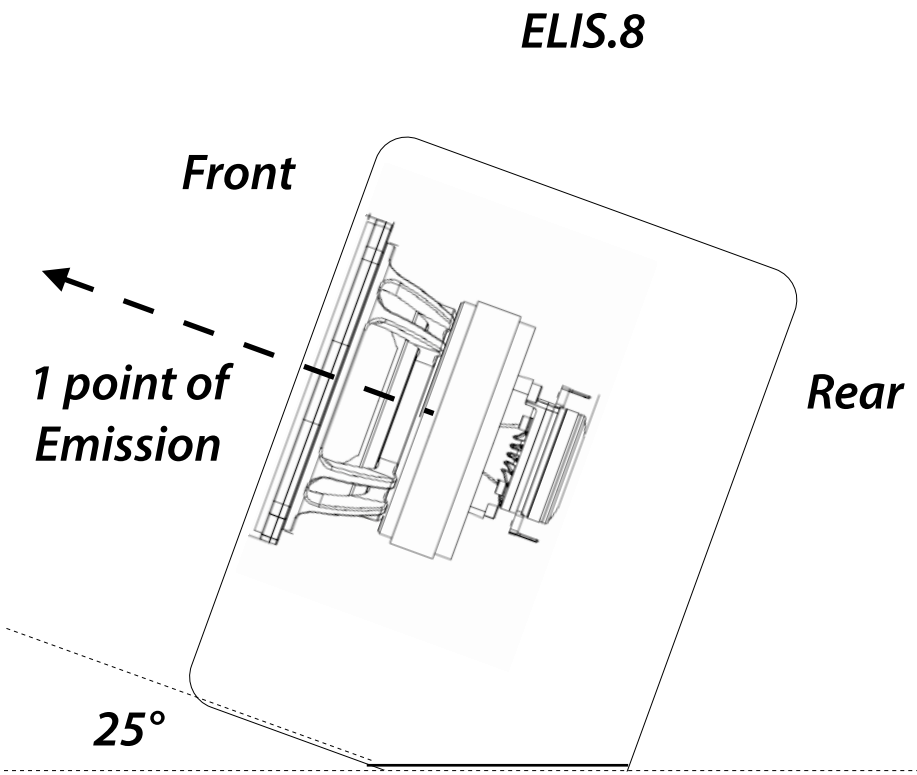

tilt angle= 0° or 25°


REDSOUND

#playdifferent

RAW-P

RAW-P

Real Adaptive Watt - Power

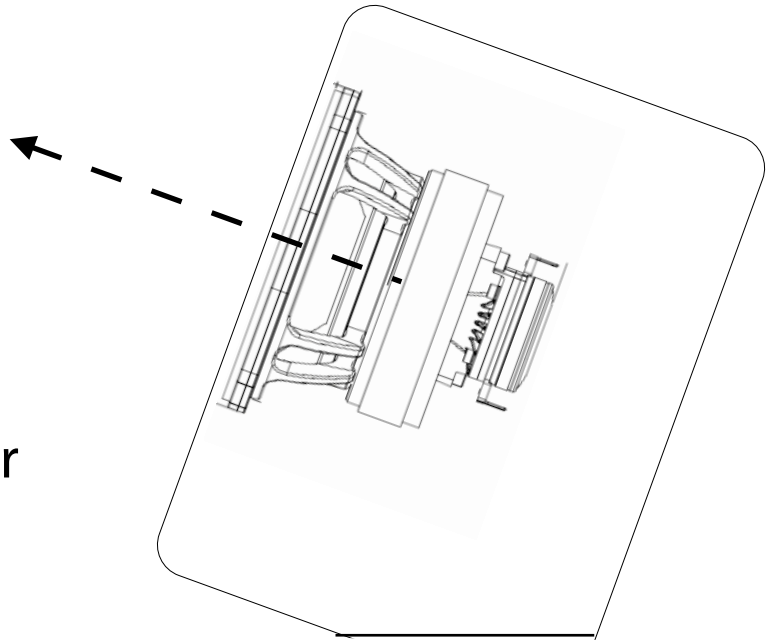


"All the real power amplifier supplied to custom speaker to give it maximum Sound Pressure Level"

REDSOUND

#playdifferent

Tilt Angle

Lateral View

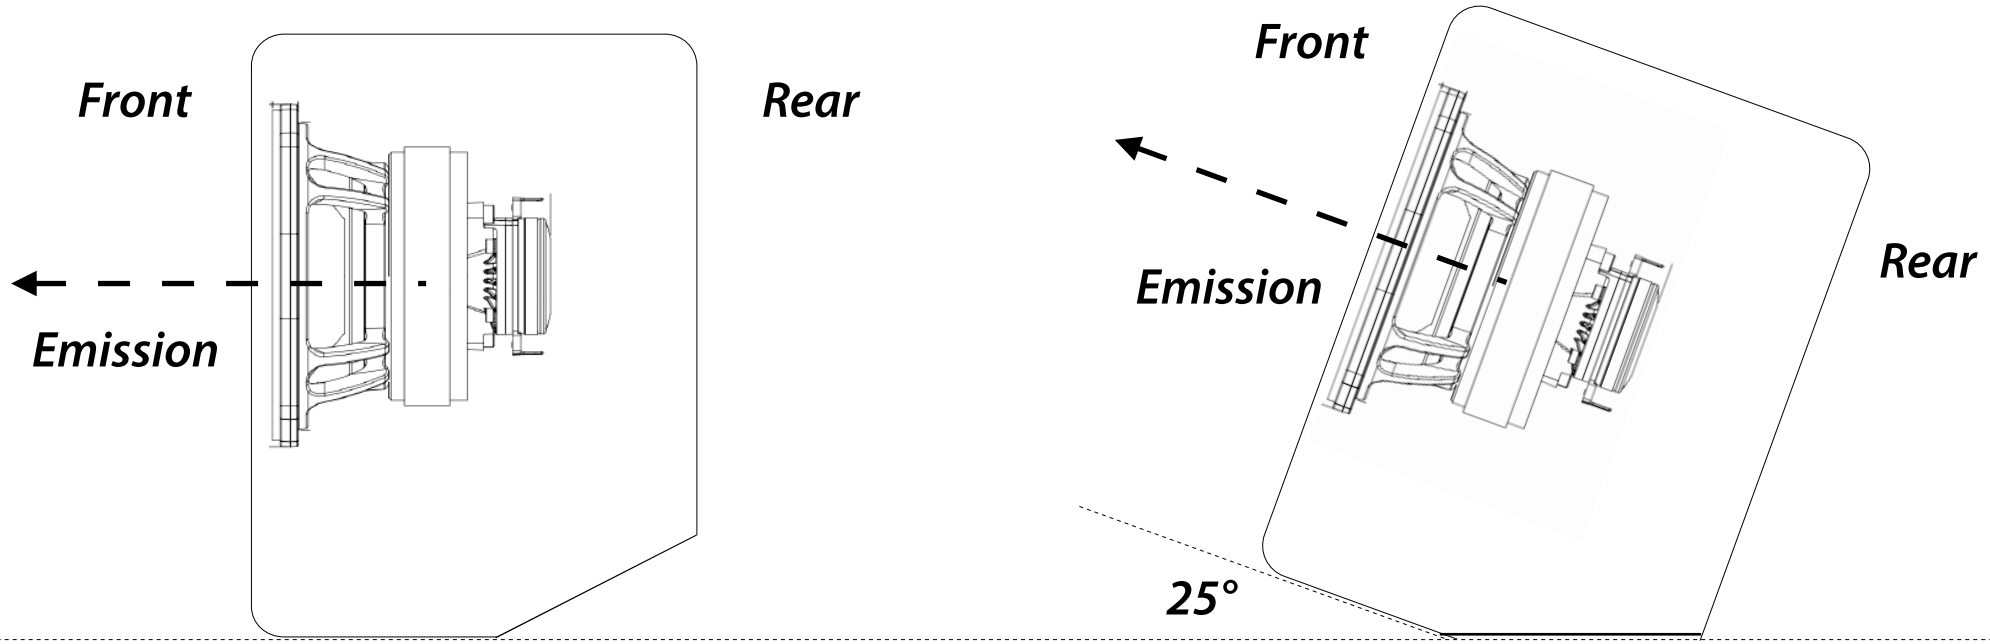

tilt angle= 0°


tilt angle= 25°

REDSOUND

#playdifferent

Tilt Angle

Lateral View

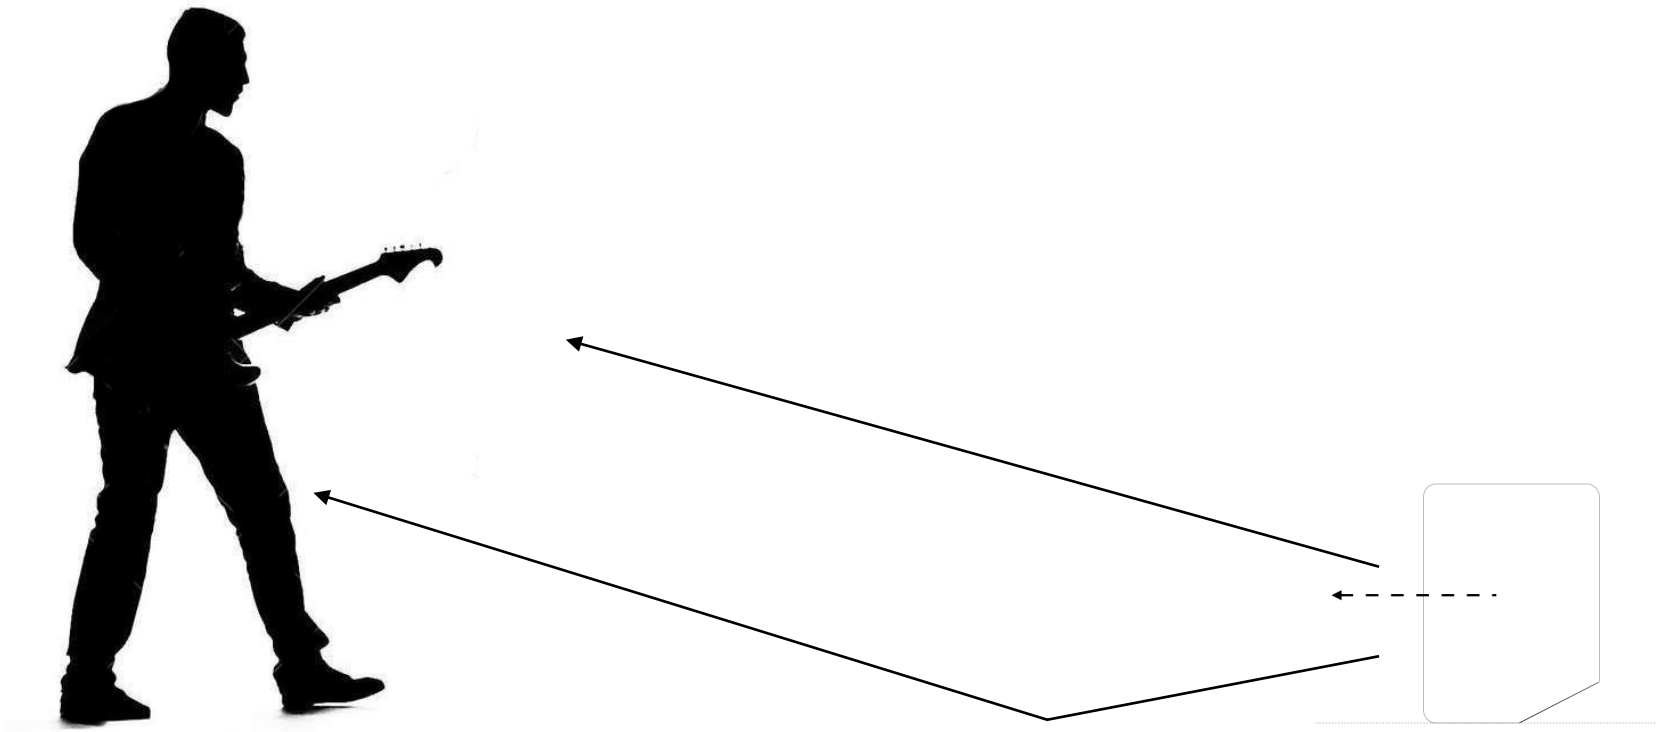

2,5 m


tilt angle= 0°

REDSOUND

#playdifferent

Tilt Angle

Lateral View

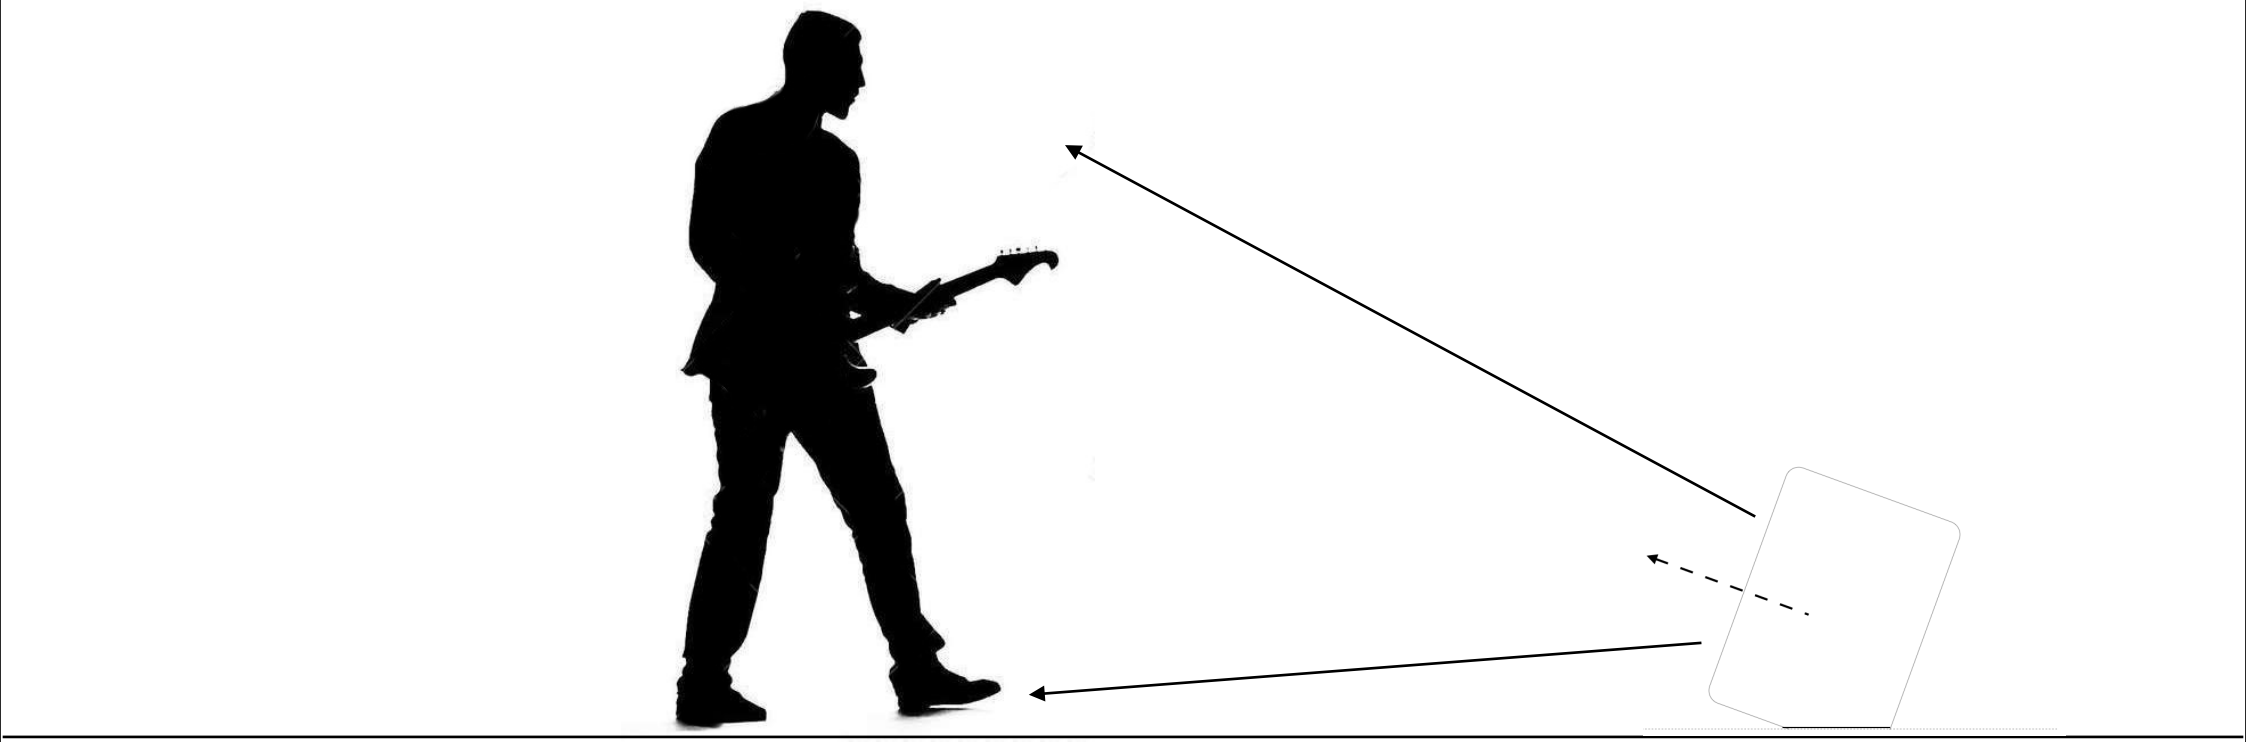

tilt angle= 25°

1,5 m

You can reduce listening distance


REDSOUND

#playdifferent

Dimensions

It's smaller than carry-on baggage



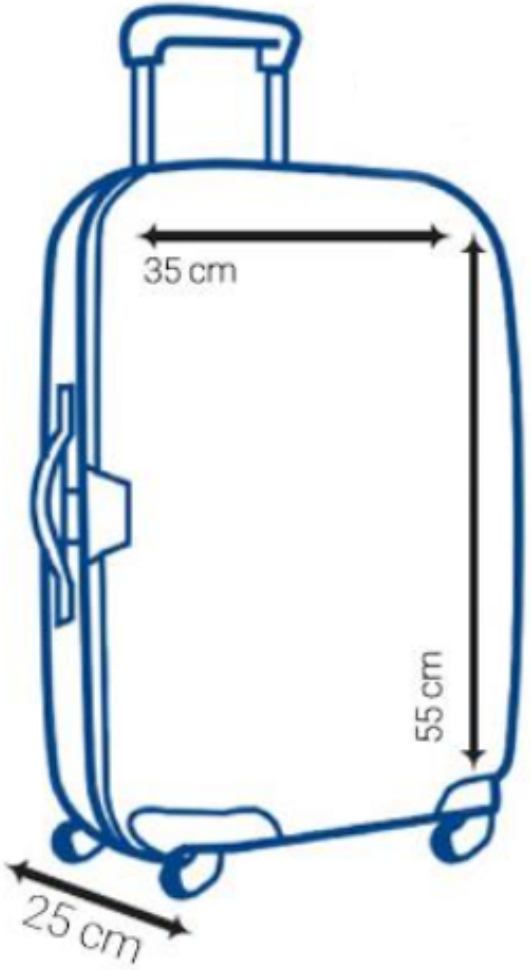


REDSOUND

#playdifferent

ELIS.8

Active Cabinet

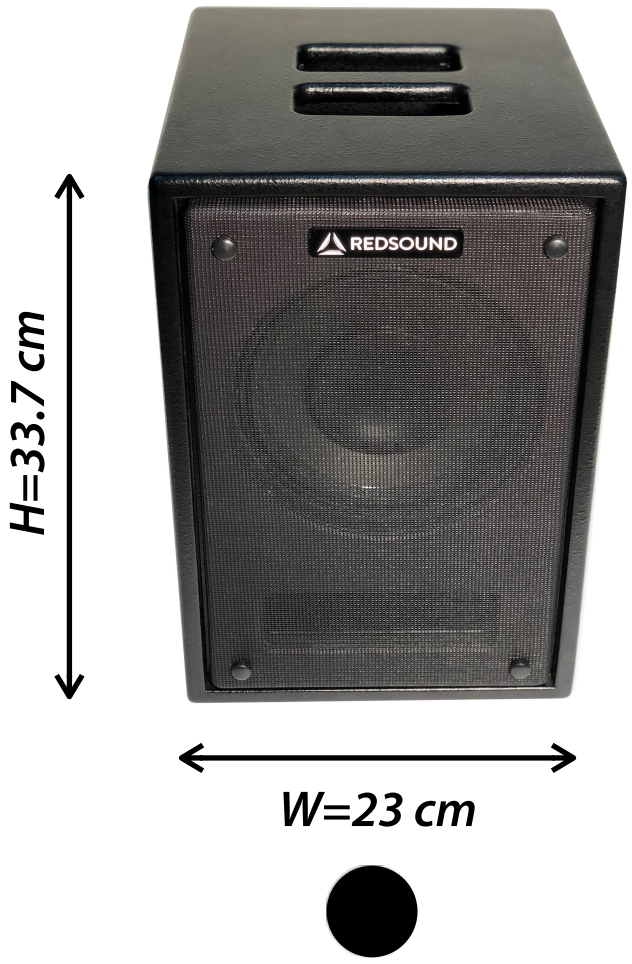

#black

Caratteristiche tecniche:

Finale di Potenza	Classe D High Level con 2 Canali Indipendenti
Alimentazione	110-120 VAC / 60 Hz con fusibile di protezione 220-240 VAC / 50 Hz con fusibile di protezione
Numero di Vie	2
Trasduttore	1 Woofer da 8” Coaxial Driver
Tweeter	1” Coaxial Driver Technology
Risposta in Frequenza	70 - 20000 Hz (+/- 3dB)
Potenza Nominale (RMS)	180 W
Potenza Massimale	360 W
Sensibilità (1W/1m)	98 dB
Rete di Crossover	Analogica Passiva
Finitura	Vernice Antigraffio
Dimensioni (cm) *(LxAxP)*	26x40x29
Peso (Kg)	9.8
Posizione d’ascolto	Dritto 0° - Inclinato 25°
2x Ingresso di Segnale Posteriore	Jack/XLR Bilanciati
1x Uscita di Potenza Posteriore	Speakon/Jack (solo per il canale LEFT)
Accordo Reflex	Anteriore
Codice Prodotto: ELIS.8 ACT	

REDSOUND

#playdifferent

ELIS.8

Active Cabinet



#black

Technical Specs:


Power Amplifier	Classe D High Level with 2 Indipendent Channel
IEC Power IN	110-120 VAC / 60 Hz con fusibile di protezione 220-240 VAC / 50 Hz con fusibile di protezione
Way Number	2
Transducer	8" Ceramic Woofer Coaxial Driver
Tweeter	1" Coaxial Driver Technology
Frequency Response	70 - 20000 Hz (+/- 3dB)
Nominal Power (RMS)	180 W
Max Power	360 W
Sensibility (1W/1m)	98 dB
Crossover	Passive, Analogic
Finishing	No Scrape Varnish
Dimensions (inch) *(WxHxD)*	10.2"x15.7"x11.4"
Weight (lb)	21.6
Listening Position	Straight 0° - Tilt Angle 25°
2x Rear Input Signal	Jack/XLR Balanced
1x Rear Power Output	Speakon/Jack (for the LEFT Monitor)
Reflex	Front
Product Code: ELIS.8 ACT	

REDSOUND

#playdifferent

ELIS.8

Passive Cabinet

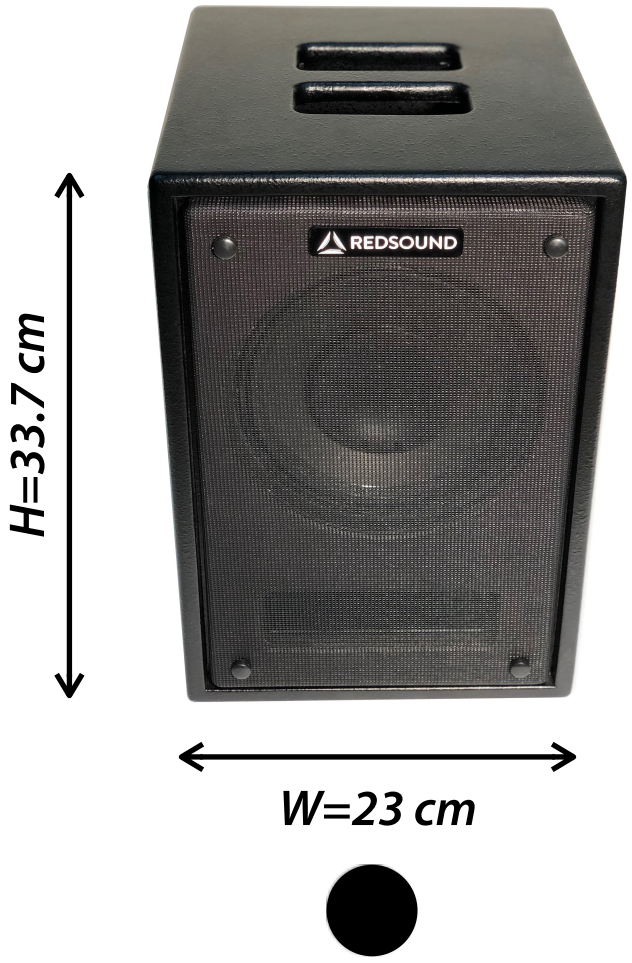

#black

Caratteristiche tecniche:

Numero di Vie	2
Trasduttore	1 Woofer da 8” Coaxial Driver
Tweeter	1” Coaxial Driver Technology
Risposta in Frequenza	70 - 20000 Hz (+/- 3dB)
Potenza Nominale (RMS)	180 W
Potenza Massimale	360 W
Sensibilità (1W/1m)	98 dB
Rete di Crossover	Analogica Passiva
Finitura	Vernice Antigraffio
Dimensioni (cm) *(LxAxP)*	26x40x29
Peso (Kg)	8.5
Posizione d’ascolto	Dritto 0° - Inclinato 25°
1x Ingresso di Potenza Posteriore	Speakon/Jack
Accordo Reflex	Anteriore
Codice Prodotto: ELIS.8 PASS	

REDSOUND

#playdifferent

ELIS.8

Passive Cabinet



#black

Technical Specs:

Way Number	2
Transducer	8" Ceramic Woofer Coaxial Driver
Tweeter	1" Coaxial Driver Technology
Frequency Response	70 - 20000 Hz (+/- 3dB)
Nominal Power (RMS)	180 W
Max Power	360 W
Sensibility (1W/1m)	98 dB
Crossover	Passive, Analogic
Finishing	No Scrape Varnish
Dimensions (inch) *(WxHxD)*	10.2"x15.7"x11.4"
Weight (lb)	18.7
Listening Position	Straight 0° - Tilt Angle 25°
1x Rear Power Input	Speakon/Jack
Reflex	Front
Product Code: ELIS.8 PASS	

REDSOUND

#playdifferent

note

www.redsounditalia.com
info@redsounditalia.com

MADE IN ITALY