
SANSUI AU-517 SCHEMATIC DIAGRAM

* La présention et les spécifications sont susceptibles d'être modifiées sans préavis par suites d'améliorations éventuelles.
* Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
* Design and specifications subject to change without notice for improvement.

Sansui

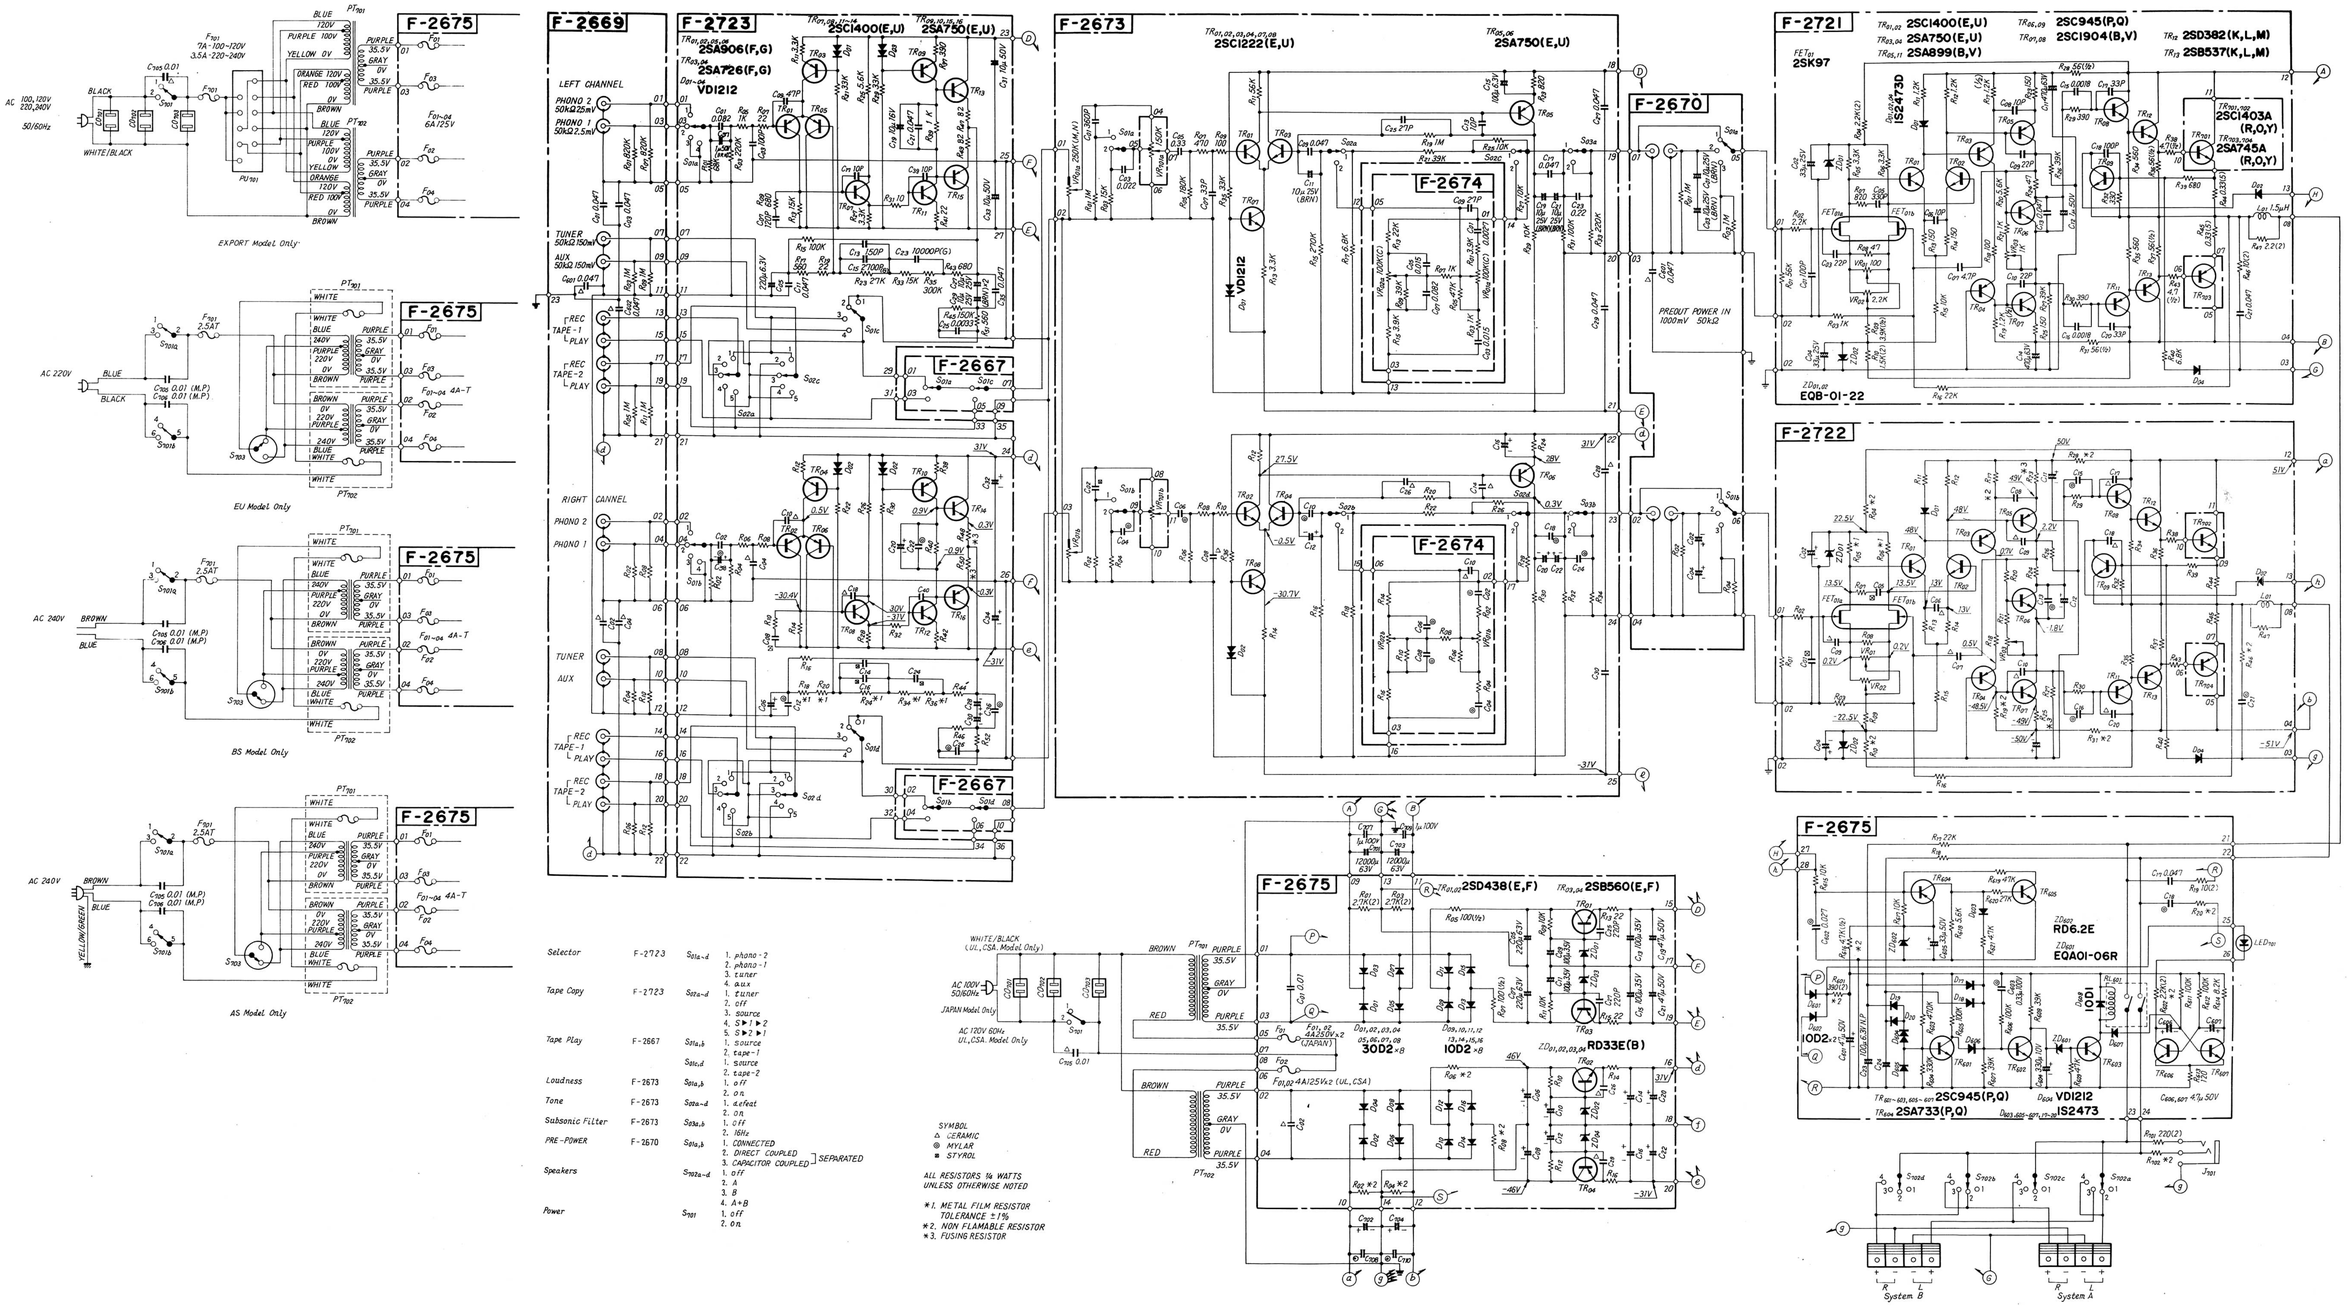

Selector	F-2723	S_{01a-d}	1. phono-2 2. phono-1 3. tuner 4. aux
Tape Copy	F-2723	S_{02a-d}	1. tuner 2. off 3. source 4. S▶1▶2 5. S▶2▶1
Tape Play	F-2667	$S_{01a,b}$	1. source 2. tape-1
		$S_{01c,d}$	1. source 2. tape-2
Loudness	F-2673	$S_{01a,b}$	1. off 2. on
Tone	F-2673	S_{02a-d}	1. defeat 2. on
Subsonic Filter	F-2673	$S_{03a,b}$	1. off 2. 16Hz
PRE-POWER	F-2670	$S_{01a,b}$	1. CONNECTED 2. DIRECT COUPLED 3. CAPACITOR COUPLED — SEPARATED
Speakers		S_{022a-d}	1. off 2. A 3. B 4. A+B
Power		S_{701}	1. off 2. on

SYMBOL
△ CERAMIC
◎ MYLAR
■ STYROL

ALL RESISTORS ¼ WATTS UNLESS OTHERWISE NOTED

*1. METAL FILM RESISTOR TOLERANCE ±1%
*2. NON FLAMABLE RESISTOR
*3. FUSING RESISTOR

Printed in Japan (18M2) 〈9237540〉