
GX-620

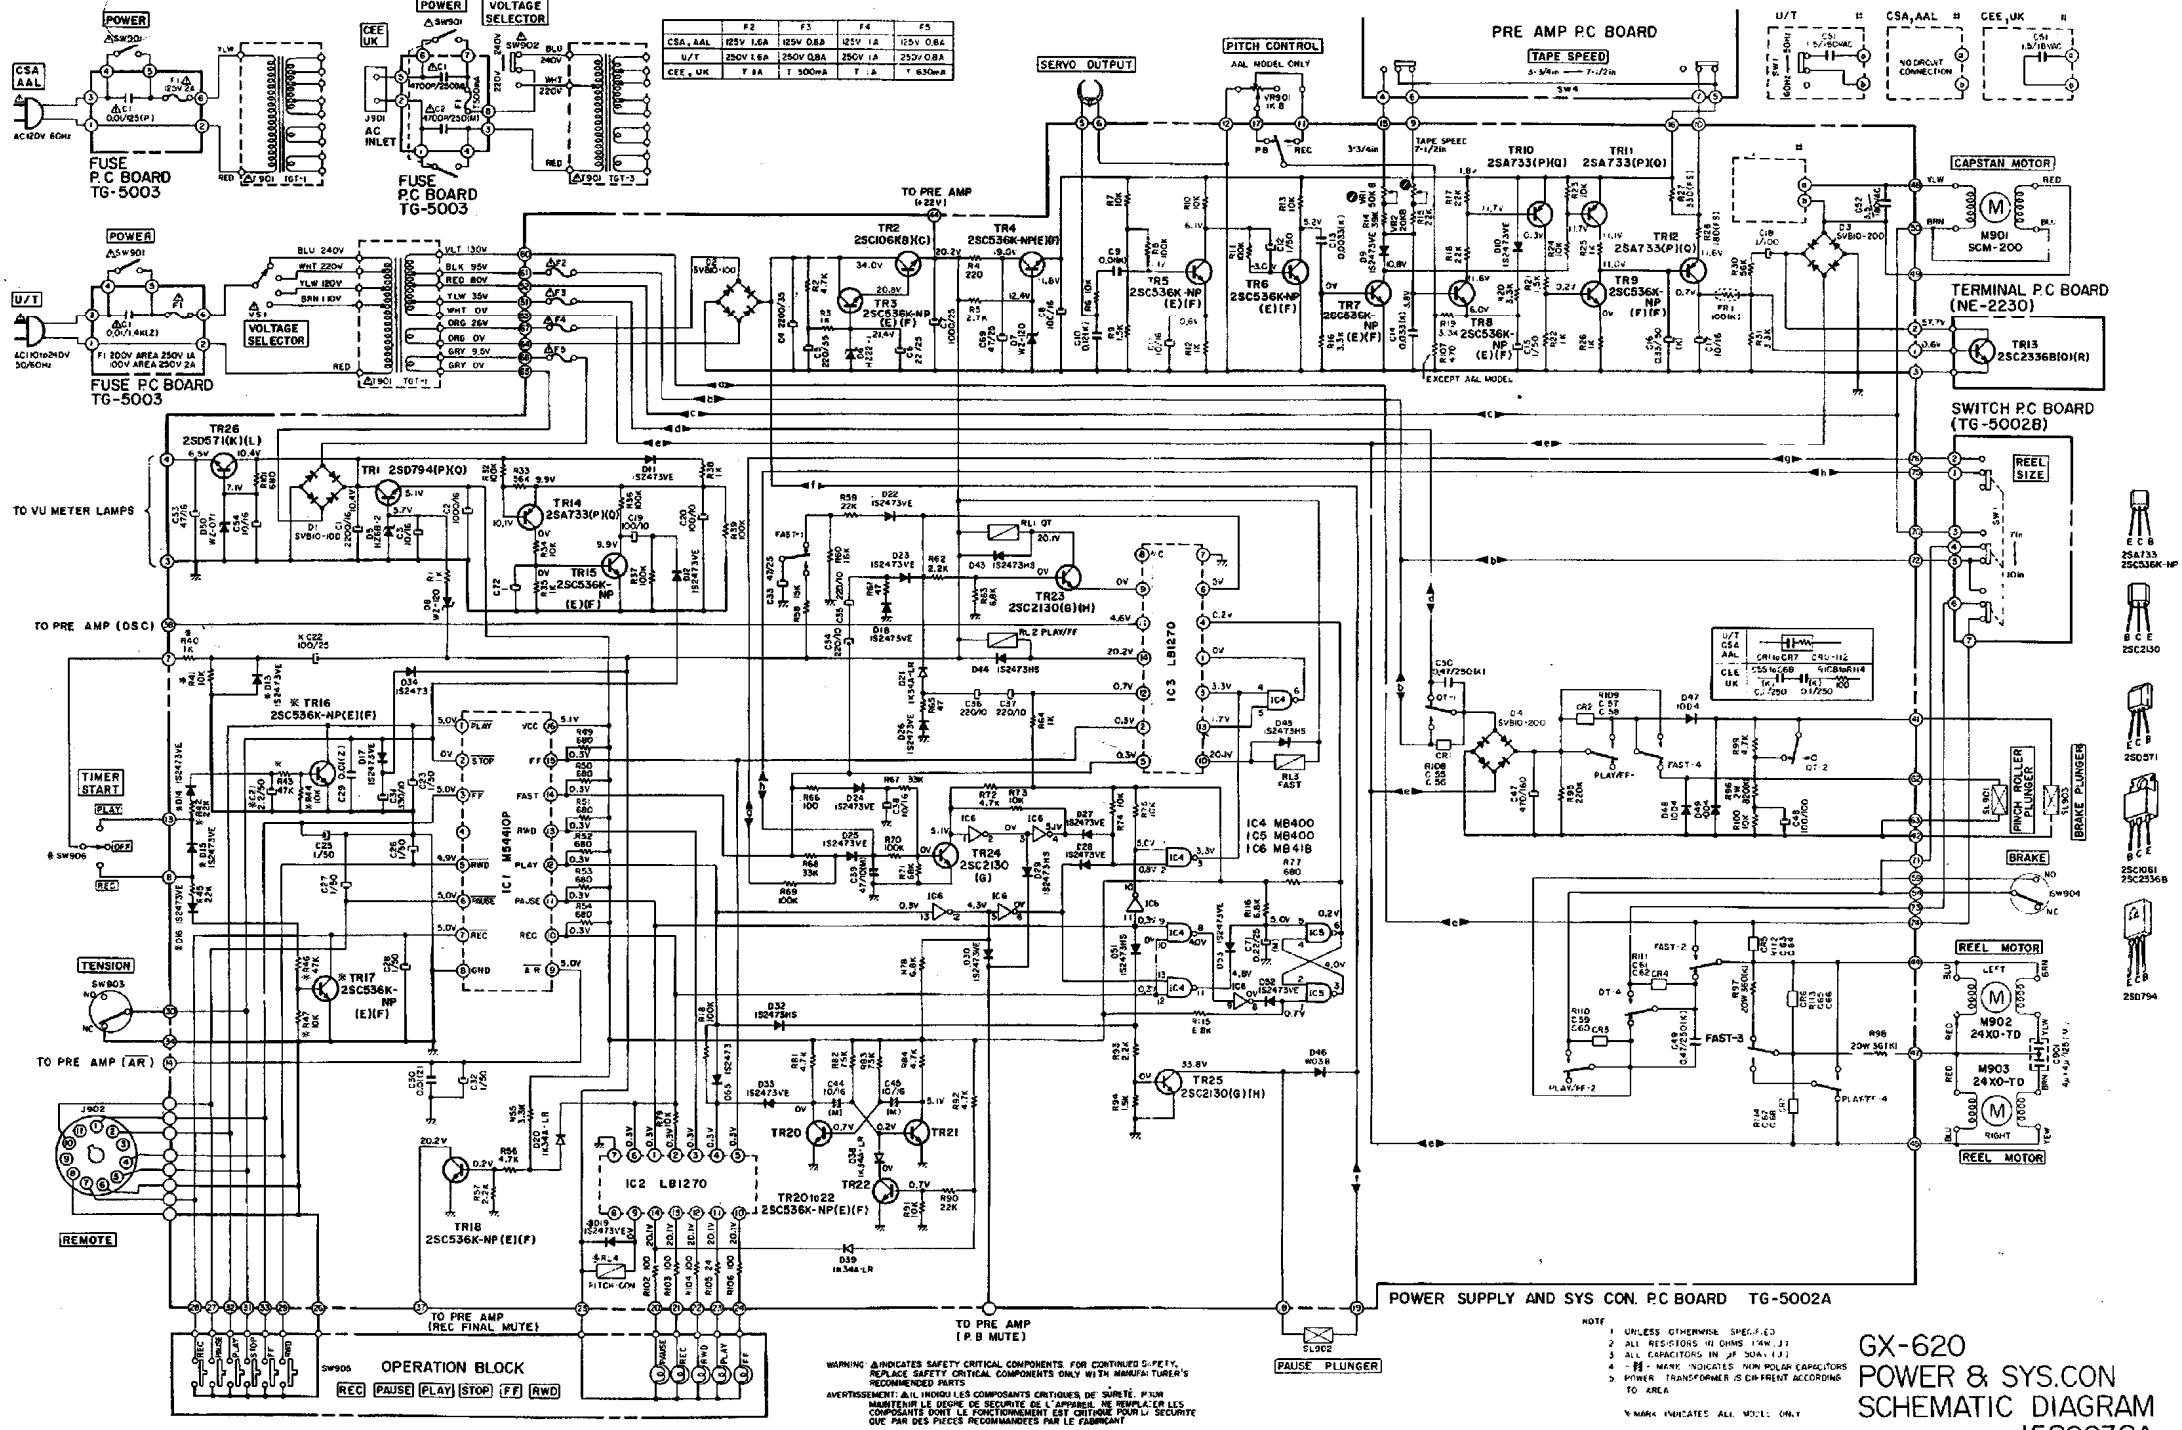

	F2	F3	F4	F5
CSA, AAL	125V 1.6A	125V 0.8A	125V 1A	125V 0.8A
U/T	250V 1.6A	250V 0.8A	250V 1A	250V 0.8A
CEE, UK	T 1A	T 500mA	T 1A	T 630mA


WARNING: ⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS

AVERTISSEMENT: ⚠ IL INDIQUE LES COMPOSANTS CRITIQUES DE SURETÉ. POUR MAINTENIR LE DEGRÉ DE SECURITÉ DE L'APPAREIL, NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITÉ QUE PAR DES PIÈCES RECOMMANDÉES PAR LE FABRICANT

NOTE
1. UNLESS OTHERWISE SPECIFIED
2. ALL RESISTORS IN OHMS 1/4W, ±5
3. ALL CAPACITORS IN μF 50V, ±10
4. ※ MARK INDICATES NON POLAR CAPACITORS
5. POWER TRANSFORMER IS CHANGEABLE ACCORDING TO AREA

※ MARK INDICATES ALL MODEL ONLY

GX-620 POWER & SYS.CON SCHEMATIC DIAGRAM NO.2-1 1582038A

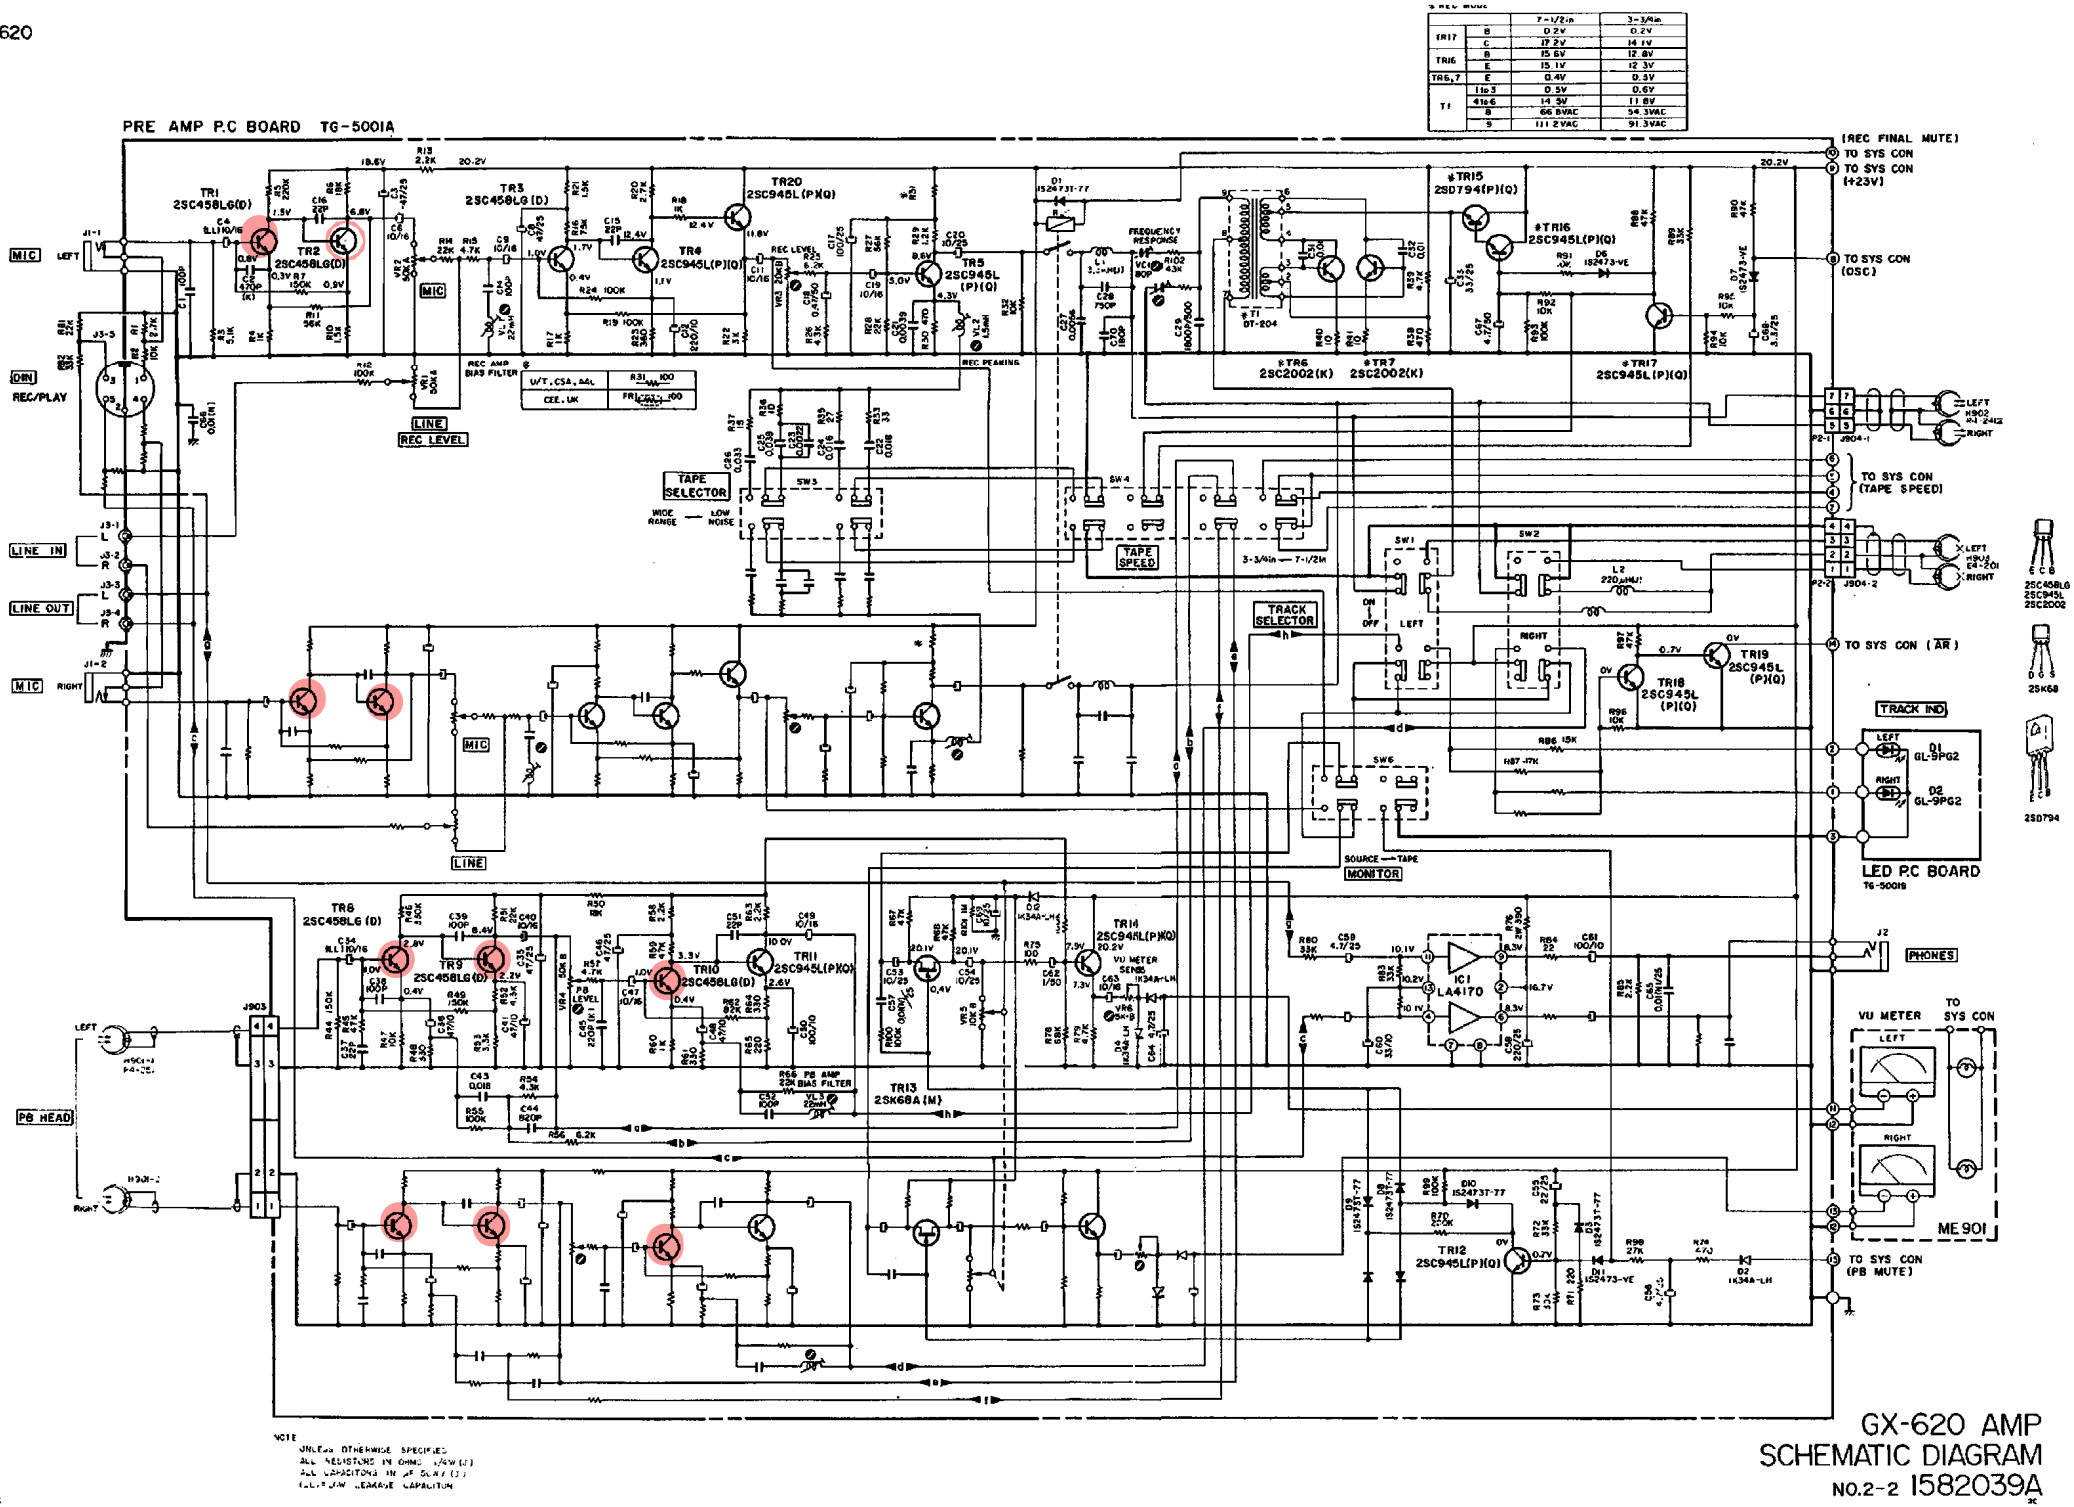

		7-1/2in	3-3/4in
TR17	B	0.2V	0.2V
	C	19.2V	14.1V
TR16	B	15.6V	12.8V
	E	15.1V	12.3V
TR6,7	E	0.4V	0.3V
T1	1 to 3	0.5V	0.6V
	4 to 6	14.5V	11.8V
	8	66.9VAC	54.5VAC
	9	111.2VAC	91.3VAC

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/4W (J)
ALL CAPACITORS IN μF 50V (J)
(L) : LOW LEAKAGE CAPACITOR

GX-620 AMP SCHEMATIC DIAGRAM

NO.2-2 1582039A