EN

Professionally approved products.

Datasheet

Miniature Toggle Switch

RS Stock number 734-7028



Specifications:

MECHANICAL LIFE:	40,000 make-and-break cycles.
CONTACT RESISTANCE:	10mΩ max. initial @ 2-4VDC 100mA for both silver and gold plated contacts
INSULATION RESISTANCE:	1000MΩmin.
DIELECTRIC STRENGTH:	1,000Vrms min. @ sea level.
OPERATING TEMPERATURE:	-30˚C to 85˚C.
CASE:	Dially phthalate (DAP) UL94v-0)
ACTUATOR:	Brass, chrome plated
Bushing:	Brass, nickel plated
Housing:	Stainless steel
CONTACT/TERMINAL:	Silver or gold plated
Switch Support:	Brass, tin plated
RoHS:	2002/95/EC

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

Professionally approved products.

Datasheet

Dimensions – inch
mm

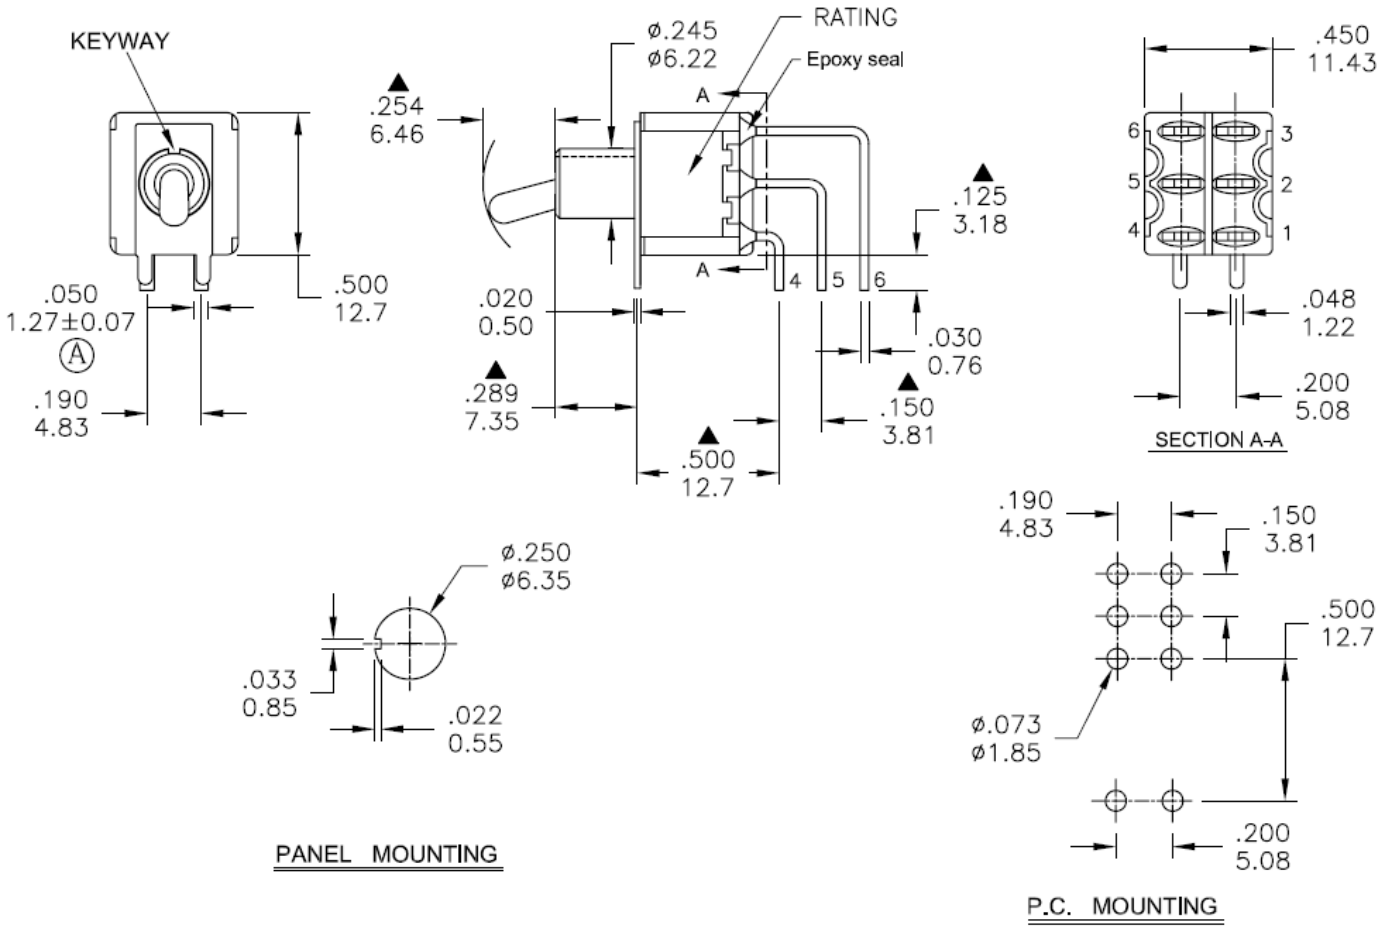

Model No.	POS.1	POS.2	POS.3
			
1MD1	ON	NONE	ON
Term. Comm.	2-3,5-6	N/A	2-1,5-4
SCHEMATIC			

SWITCH FUNCTION

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.