


F-VX500

SERVICE MANUAL

US Model
Canadian Model
AEP Model
UK Model
E Model

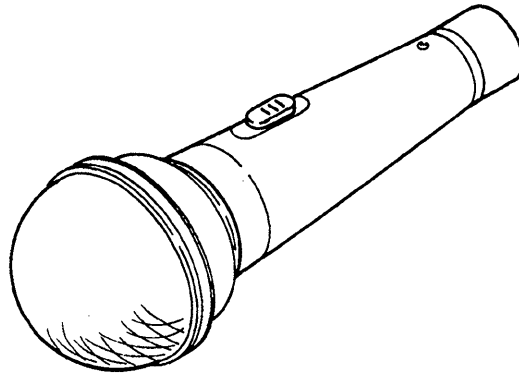


SPECIFICATIONS

Type : Dynamic microphone
Directivity : Uni-directional
Frequency response : 80Hz—15,000Hz
Output impedance : 600 ohms \pm 20% at 1kHz, unbalanced
Effective output level : -56.8dBm
(0dBm=1mW/Pa, 1,000Hz 1Pa=10 μ bar)
Dimensions : 55 mm (2 $\frac{1}{4}$ inches) dia. \times 166 mm (6 $\frac{5}{8}$ inches)
Weight : Approx. 230g (8.1 oz)
Supplied accessories : Microphone cord 1

Design and specifications subject to change without notice.

● WIRING DIAGRAM

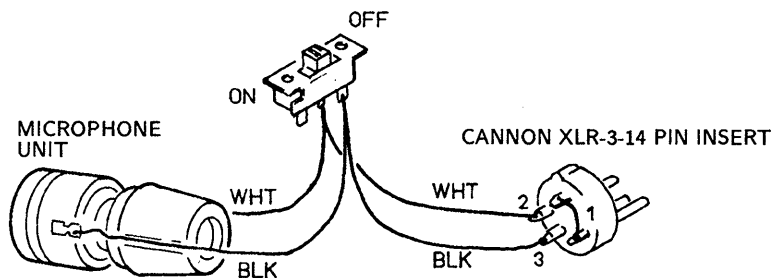

DYNAMIC MICROPHONE
SONY[®]

