Update guide for Mimic 1.1.00 firmware update

This document describes the firmware update procedure for your TC electronic Mimic doubler pedal.

What's new?

- default settings have been retuned to minimize possible combfilter artefacts when used in mono with 2 or 3 voice mode

Preparing the firmware update:

1) Download and save the **Mimic firmware updater 1.1.0**0 from the TC electronic website using a PC or Macintosh computer: http://www.tcelectronic.com/mimiq-doubler/support/
2) Connect your Mimic pedal to your Mac or PC computer using a **mini USB cable**
3) Get your Mimic into Boot mode by **inserting the power plug while holding down the footswitch** Your Mimic LED will turn green, indicating it is ready to receive the firmware upload
4) Start the firmware update application (-> *your pedal name should be shown in the device status field as shown in the screenshot below*)

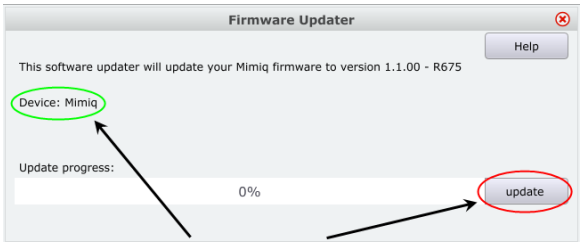

once your pedal name is shown in the "Device" field, click the "update" button to start firmware upload

5) Click on the "**update**" button to start firmware upload
6) Wait until the progress bar has reached 100% and the status parameter displays: "**firmware upgrade successful**"

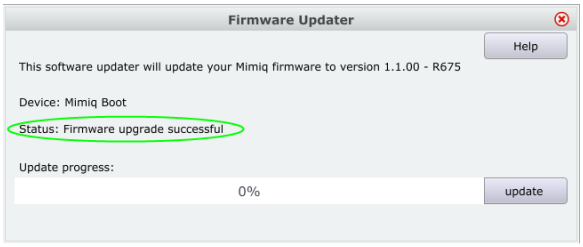

Wait until the progress bar reached 100% and the "Status" parameter shows "Firmware upgrade successful"