High Voltage Transistors
PNP Silicon

MPSA92*
MPSA93

***Motorola Preferred Device**





CASE 29–11, STYLE 1
TO–92 (TO–226AA)

MAXIMUM RATINGS

Rating	Symbol	MPSA92	MPSA93	Unit
Collector–Emitter Voltage	V_{CEO}	–300	–200	Vdc
Collector–Base Voltage	V_{CBO}	–300	–200	Vdc
Emitter–Base Voltage	V_{EBO}	–5.0		Vdc
Collector Current — Continuous	I_C	–500		mAdc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	625 5.0		mW mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	1.5 12		Watts mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage(1) (I_C = –1.0 mAdc, I_B = 0)	 MPSA92 MPSA93	$V_{(BR)CEO}$	 –300 –200	 — —	Vdc
Collector–Base Breakdown Voltage (I_C = –100 μAdc, I_E = 0)	 MPSA92 MPSA93	$V_{(BR)CBO}$	 –300 –200	 — —	Vdc
Emitter–Base Breakdown Voltage (I_E = –100 μAdc, I_C = 0)		$V_{(BR)EBO}$	–5.0	—	Vdc
Collector Cutoff Current (V_{CB} = –200 Vdc, I_E = 0) (V_{CB} = –160 Vdc, I_E = 0)	 MPSA92 MPSA93	I_{CBO}	 — —	 –0.25 –0.25	μAdc
Emitter Cutoff Current (V_{EB} = –3.0 Vdc, I_C = 0)		I_{EBO}	—	–0.1	μAdc

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

Preferred devices are Motorola recommended choices for future use and best overall value.

REV 1

© Motorola, Inc. 1998

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Max	Unit
ON CHARACTERISTICS(1)					
DC Current Gain		h_{FE}			—
(I_C = –1.0 mAdc, V_{CE} = –10 Vdc)	Both Types		25	—	
(I_C = –10 mAdc, V_{CE} = –10 Vdc)	Both Types		40	—	
(I_C = –30 mAdc, V_{CE} = –10 Vdc)	MPSA92		25	—	
	MPSA93		25	—	
Collector–Emitter Saturation Voltage		$V_{CE(sat)}$			Vdc
(I_C = –20 mAdc, I_B = –2.0 mAdc)	MPSA92		—	–0.5	
	MPSA93		—	–0.4	
Base–Emitter Saturation Voltage		$V_{BE(sat)}$	—	–0.9	Vdc
(I_C = –20 mAdc, I_B = –2.0 mAdc)					
SMALL–SIGNAL CHARACTERISTICS					
Current–Gain — Bandwidth Product		f_T	50	—	MHz
(I_C = –10 mAdc, V_{CE} = –20 Vdc, f = 100 MHz)					
Collector–Base Capacitance		C_{cb}			pF
(V_{CB} = –20 Vdc, I_E = 0, f = 1.0 MHz)	MPSA92		—	6.0	
	MPSA93		—	8.0	

1. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

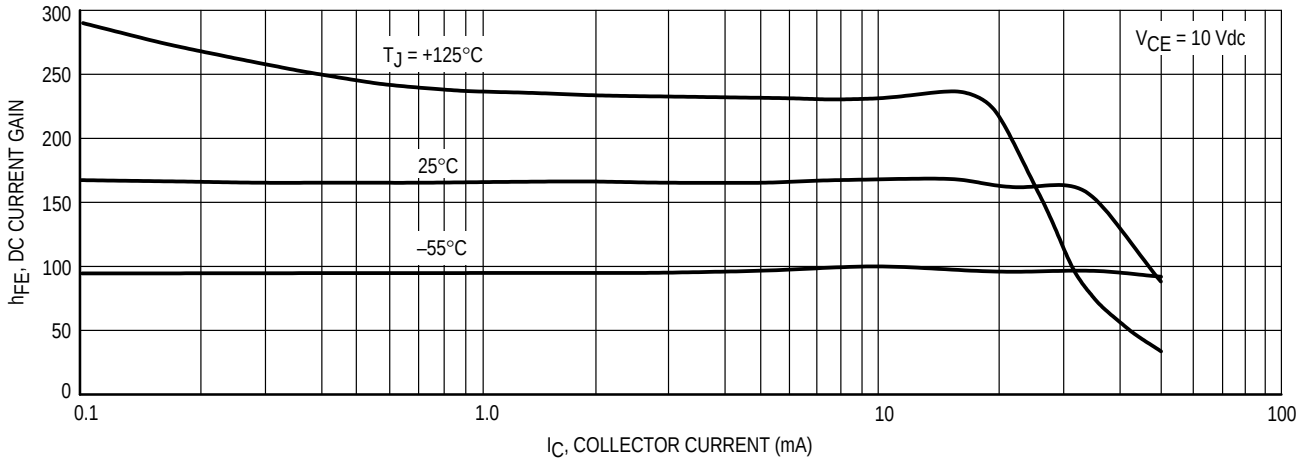

Figure 1. DC Current Gain

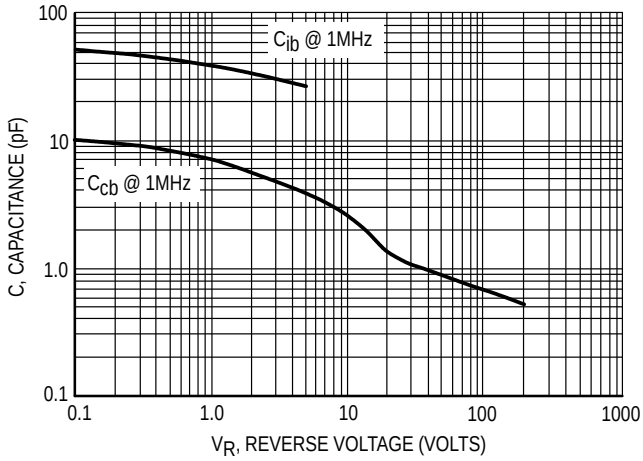

Figure 2. Capacitance

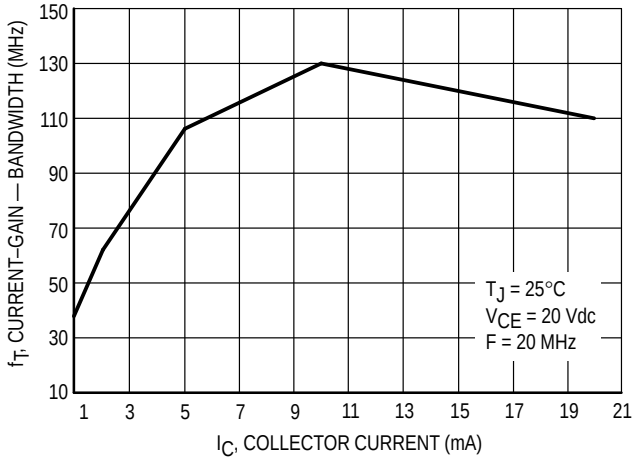

Figure 3. Current–Gain — Bandwidth

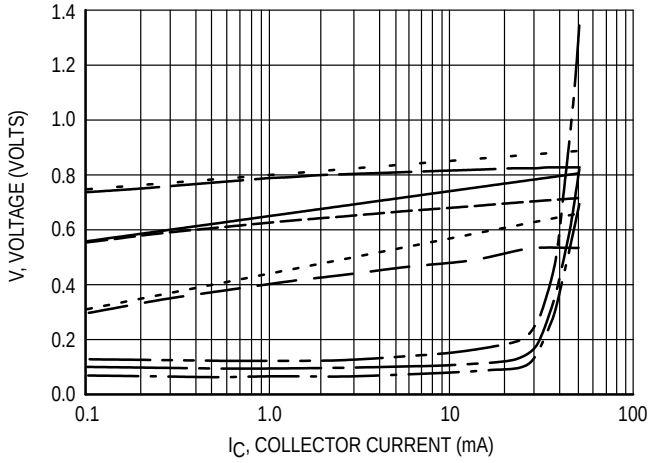

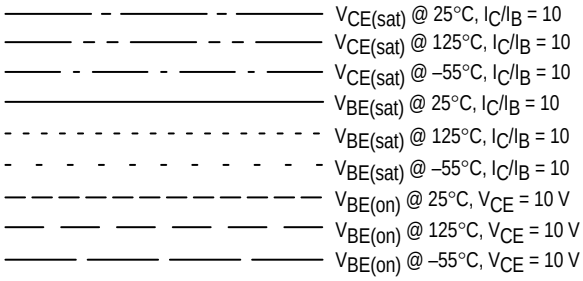

Figure 4. ”ON” Voltages

PACKAGE DIMENSIONS

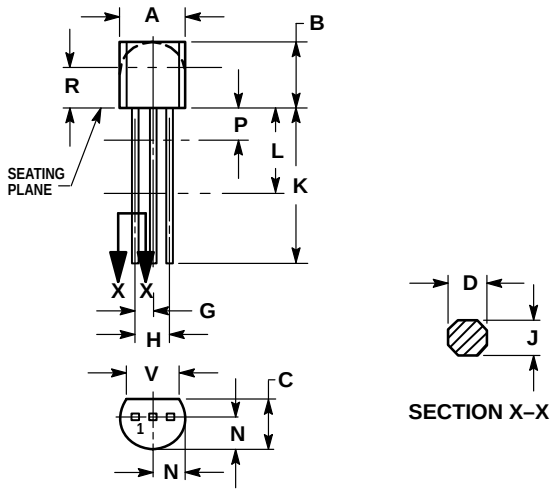

CASE 029–11
(TO–226AA)
ISSUE AJ

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

STYLE 1:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:
USA / EUROPE / Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1–303–675–2140 or 1–800–441–2447

Customer Focus Center: 1–800–521–6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1–602–244–6609
Motorola Fax Back System – US & Canada ONLY 1–800–774–1848
– http://sps.motorola.com/mfax/

HOME PAGE: http://motorola.com/sps/

JAPAN: Nippon Motorola Ltd.; SPD, Strategic Planning Office, 141,
4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan. 81–3–5487–8488

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298