
NUX


MINI PEDAL



MICRO USB PORT
Connect to PC/MAC using a micro USB cable for upgrade of firmware.

Note: You can't connect a USB power supply to the USB port. A conventional power supply is required for operating this product.

POWER IN
9V DC with center negative, and capable of supplying 300mA or more.

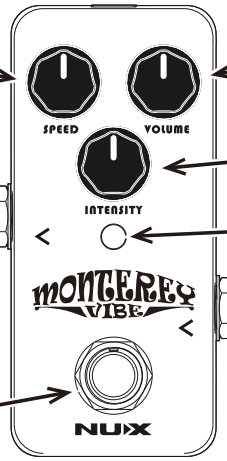

SPEED KNOB
Varies the sweep speed.

VOLUME KNOB
Control the level of signal.

INTENSITY KNOB
Control the amount of sweep deviation.

OUTPUT
Connect the OUTPUT of the pedal to your guitar amp or the input of the other efects unit with a 1/4-inch mono phone plug.

LED INDICATOR
Lights up when the pedal is enabled.

INPUT
Connect the INPUT of the pedal to your guitar or some other efects unit with a 1/4-inch mono phone plug.

ON/OFF Switch
This foot switch is used to turn effect on/off.

INTRODUCTION

The Monterey Vibe is perhaps the most colorful effects we created and it can be used as chorus, rotary speaker or phaser. By using a powerful 32bit float point DSP, we recreate the complex physical phenomena of 4-stage phaser based on a pulsating bulb surrounded by four photoresists.

Features

- Virtual analog algorithm for highly accurate recreate of every stage of allpass filter and the associated pulsating driver circuitry.
- 120%(+3dB) boost level when your crank up the volume knob.
- Buffer or true bypass.

Performance

- Ultra low noise, high performance 96bkHz/24bit A/D and D/A converters
- 100dB typical Dynamic Range.
- Zero latency analog routing for superb audio performance.
- 32-bit floating point processing with high performance DSP core
- Micro USB port for upgrade firmware.

More

- Luminous knobs for checking on the dark stage
- Strong and lightweight aluminum die-cast chassis
- 9V center negative DC supply, 90mA current draw
- Dimensions: 94(L) X 51(W) X 53(H) mm / 3.7(L)X2.0(W)X2.08(H) inches
- Weight: 174 g / 6 oz

Setting the Bypass Mode

Connect a 9V power supply to the DC input socket:

-The LED will blink in green briefly to indicating current mode is buffered bypass.
-The LED will blink in red briefly to indicating current mode is ture bypass.

To change the bypass mode, unplug the pedal first, and press and hold the footswitch while re-applying power to the pedal. the pedal will cycle to the next mode, and the color of led indicates the current mode.

*Specification may change without notice.

RoHS

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

©2015 Cherub Technology-All rights reserved. No part of this publication may be reproduced in any form without prior written permission of Cherub Technology.


www.nuxefx.com Made in China

MONTEREY VIBE

MODEL: NCH-1
Monterey Vibe

NUX

MINI PEDAL




USB接口

使用一条USB连接线将电脑和效果器连接起来。通过网站提供的刷机软件可以升级效果器的固件。

注意：连接USB接口并不会为效果器供电，使用时需要将外接电源插入到电源接口。

电源接口

使用合格的效果器专用外接电源为效果器供电，电源的规格是9V内负外正，供电电流不低于300mA。

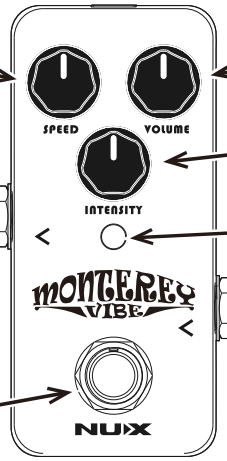

速度旋钮

调节回旋效果的波动速度。

音量旋钮

调节音量的大小。

深度旋钮

控制回旋效果的整体深度。

输出接口

连接吉他音箱或其他效果器的输入端到这个接口。

指示灯

灯点亮时表明效果激活，熄灭时效果旁路。

输入接口

连接吉他或其他效果器的输出到这个接口。

效果踩钉

这个坚固的踩钉用来控制效果的激活或关闭。

产品简介

蒙特利尔回旋是一种色彩丰富的周边效果器,可以调节出合唱、旋转喇叭或相位效果。由于使用了强大的32比特浮点DSP，我们可以重建由4级全通滤波器和光学扫描电路共同组成的复杂物理特性。

产品特点

- 模拟60年代经典的回旋效果电路，精确重建光学回旋效果响应和独特的4级全通滤波扫描效果。
- 改进的音量控制，提供超过120%（3dB）的效果信号，使独奏效果更富感染力。
- 可选择使用缓冲直通或者机械切换（通过高品质的音频继电器）直通。
- 登录我们的网站下载升级程序，然后通过USB接口连接电脑(PC/MAC)刷新。

产品性能

- 采用超低噪声/高性能的96KHz/24比特数模转换器
- 超过100分贝的典型动态范围
- 由模拟直通电路构成的零系统延迟
- 内部使用32比特浮点信号处理器
- 使用微型USB接口升级系统固件和效果音色

更多特点

- 使用黑暗环境下更易观察的夜光旋钮
- 轻型但不失坚固的铝合金压铸外壳
- 9伏内负外正的外接电源接口，功耗低至100毫安以下
- 重量: 174克
- 体积: 94(L) X 51(W) X53(H) mm

如何设置直通模式

连接9伏电源适配器到电源接口开机，指示灯将闪烁一下：

-如果指示灯的颜色是绿色，代表效果器处于缓冲直通状态。
-如果指示灯的颜色是红色，代表效果器处于机械继电器直通状态。

设置直通模式的方法：首先断开效果器电源，按住踩钉然后重新插入电源开机，效果器将更改直通方式并用指示灯的颜色来指示当前的模式，红色代表继电器直通，绿色代表缓冲直通。出厂时，效果器设置在缓冲直通模式。

*技术规格如有变更恕不另行通知。

广东省珠海市高新区唐家湾镇科技九路10号
珠海市蔚科科技开发有限公司　售后服务部
邮编：519085　网址：www.nuxefx.com

售后服务热线
400-990-9866

MONTEREY VIBE

MODEL: NCH-1

蒙特利尔回旋