REALISTIC®*

MICROPHONE STÉRÉO À ÉLECTRET À DOUBLE SENSIBILITÉ
33-919A



Le **micro stéréo REALISTIC à double sensibilité** est un ensemble microphonique monobloc à hautes performances dont chaque capsule utilise la variation de capacité d'un électret. Ce type de microphone est caractérisé par une très large bande passante et par un encombrement réduit car les deux capsules microphoniques sont incorporées dans la même tête. Un commutateur spécial permet de choisir entre deux effets stéréophoniques différents, l'un assurant une séparation normale des canaux, l'autre offrant une image stéréo élargie.

Le microphone est livré avec un adaptateur de support standard qui permet de le monter sur un pied et de le décrocher aisément pour le prendre à la main.

Le câble soigneusement blindé pour éviter le captage de parasites se termine par deux fiches standard de ¼'' 6.35mm.

Nous recommendons d'utiliser une pile Radio Shack no. 23-582 ou 23-552 de très longue durée.

Brancher les deux fiches du micro dans les prises correspondantes en utilisant éventuellement des adaptateurs Radio Shack. Contrôler les niveaux et l'effect stéréo avec le commutateur sur la position NORMAL. Essayer ensuite en position WIDE et noter la différence. Pour l'utilisation, choisir l'effet qui donne les meilleurs résultats.

Lorsque le microphone n'est pas utilisé, mettre le commutateur sur OFF. S'il n'est pas prévu d'utiliser le microphone pendant quelques semaines ou quelques mois, retirer la pile, car même les piles dites "étanches" peuvent laisser échapper des produits corrosifs. Ne jamais laisser une pile déchargée dans le micro.

Il est déconseillé d'utiliser continuellement (ou de ranger) le micro dans une atmosphère excessivement chaude et/ou humide.

GARANTIE LIMITÉE RADIO SHACK


Cet appareil est garanti contre toute défectuosité pour une durée de 90 jours à compter de la date d'achat. Durant cette période, Radio Shack s'engage à effectuer gratuitement toute réparation (pièces et main-d'oeuvre). Il suffit de présenter le coupon de caisse ou la facture chez n'importe quel dépositaire Radio Shack. Cette garantie ne couvre pas les frais d'expédition. Les dommages résultant d'un usage impropre ou d'un accident ne sont pas couverts par cette garantie.

NOUS RÉPARONS CE QUE NOUS VENDONS

* MARQUE DE COMMERCE DE RADIO SHACK TC DIVISION, TANDY CORPORATION

Scanned by CamScanner


MISE EN PLACE OU REMPLACEMENT DE LA PILE




CARACTÉRISTIQUES

Bande passante:	30 à 15,000Hz	**Durée de la pile:**	2000 h *au moins* (service continu)
Impédance:	600 ohms		
Sensibilité:	−72dB ±3dB (0dB = 1V/μbar, 1kHz)	**Câble:**	diam. 4mm 5/32″; long. 3m 10′
Balance des canaux:	meilleure que 3dB	**Fiches:**	diam. 6.35mm 1/4″
Directivité:	Unidirectionnelle (Voir courbes de bande passante et diagrammes polaires)	**Dimensions:**	diam. 68mm 2 11/16″; long. 203mm 8″
		Poids:	120g 4.22 oz. ..... (micro seul)
Rapport signal/bruit:	supérieur à 40dB	**Accessoires:**	Adaptateur de support, housse simili-cuir
Pile:	Pile sèche type AA		

SCHÉMA ÉLECTRIQUE

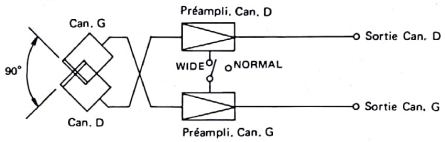

COURBES DE BANDE PASSANTE TYPE ET DIAGRAMMES POLAIRES (TYPIQUES)

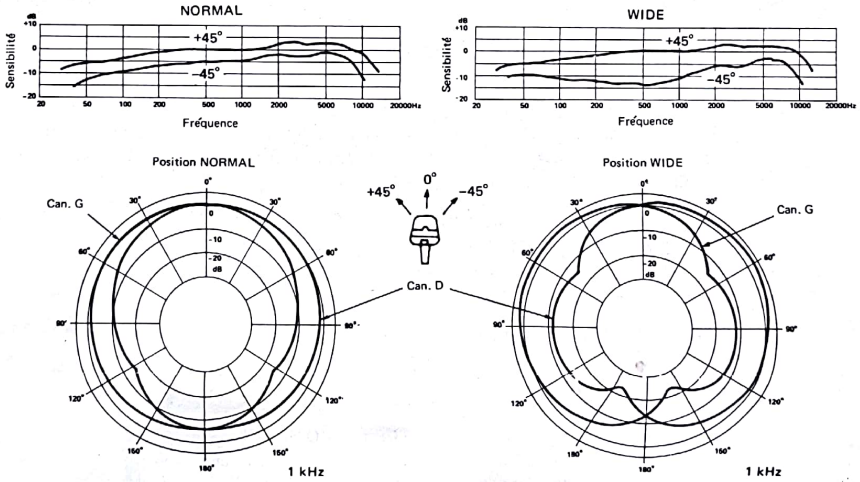

RADIO SHACK DIVISION, TANDY ELECTRONICS LIMITED
CANADA: BARRIE, ONTARIO, L4M 4W5
É.-U.: FORT WORTH, TEXAS 76102
TANDY CORPORATION

AUSTRALIE	R.-U.	BELGIQUE
280-316 VICTORIA ROAD RYDALMERE, N. S. W. 2116	BILSTON ROAD WEDNESBURY, WEST MIDLANDS WS10 7JN	PARC INDUSTRIEL DE NANINNE 5140 NANINNE

7AO

Imprimé au Japon

Scanned by CamScanner

REALISTIC®*

DUAL PATTERN STEREO ELECTRET MICROPHONE SYSTEM
33-919A



Your **REALISTIC Dual Pattern Stereo Electret Microphone** is a high-quality one-piece stereo mic which uses the electret condenser principle. This results in extremely wide frequence response and since it has two elements mounted in the head, you achieve stereo pick-up with one microphone. The special switch provides two different stereo effects: NORMAL results in an average separation effect, while WIDE results in a wider stereo image.

The microphone comes with a standard microphone adapter so you can mount it on a stand and yet easily slip it off the stand for hand-held use. The cable is specially selected for freedom from hum pick-up and is terminated in two ¼" 6.35mm plugs.

For battery replacement, we recommend Radio Shack's 23-582, or for extra-long life, use our 23-552.

Plug the Mic into appropriate jacks. If you need adapters, stop by your local Radio Shack store. Set switch to NORMAL and check pick-up and stereo effect. Now try the WIDE position and note the difference. Use the setting which provides the most suitable effect.

When not in use, leave the switch set to OFF. If you are not going to use the Mic for a few weeks or months, remove the battery. Even "leak proof" types can leak damaging chemicals. Don't leave a weak or dead battery in the Mic.

Avoid continuous operation (or storage) in environments of high temperature and/or humidity.

RADIO SHACK LIMITED WARRANTY


This equipment is warranteed against defects for 90 days from date of purchase. Within this period, we will repair it without charge for parts and labor. Simply **bring your sales slip** as proof of purchase date to any Radio Shack store. Warranty does not cover transportation costs. Nor does it cover equipment subjected to misuse or accidental damage.

We Service What We Sell

* TRADEMARKS OF RADIO SHACK TC DIVISION, TANDY CORPORATION

Scanned by CamScanner


BATTERY LOADING OR REPLACEMENT




SPECIFICATIONS


Frequency Response:	30 ~ 15,000Hz
Impedance:	600 ohms
Sensitivity:	−72dB ±3dB (0dB = 1V/μbar, 1kHz)
Channel Balance:	Within 3dB
Directivity:	Unidirectional (See frequency response curves and polar pick-up patterns)
Signal-to-Noise Ratio:	Better than 40dB
Battery:	AA type dry cell battery
Battery Life:	More than 2000 hours (continuous)
Cable and Plug:	5/32" 4mm dia. x 10' 3m length --- (cable) ¼" 6.35mm dia. --- (plug)
Size:	2-11/16" 68mm dia. x 8" 203mm length
Weight:	4.22 oz 120g ----- (Microphone only)
Accessories:	Microphone Holder, Leatherette Case

SCHEMATIC DIAGRAM

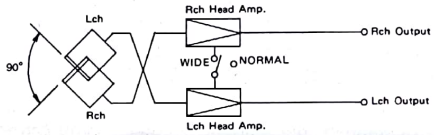

TYPICAL FREQUENCY RESPONSE CURVES AND POLAR PICK-UP PATTERNS

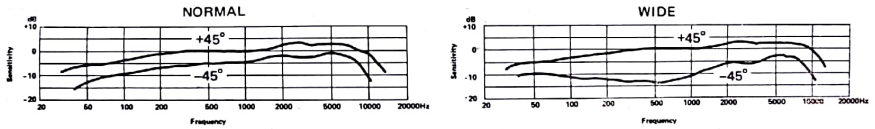

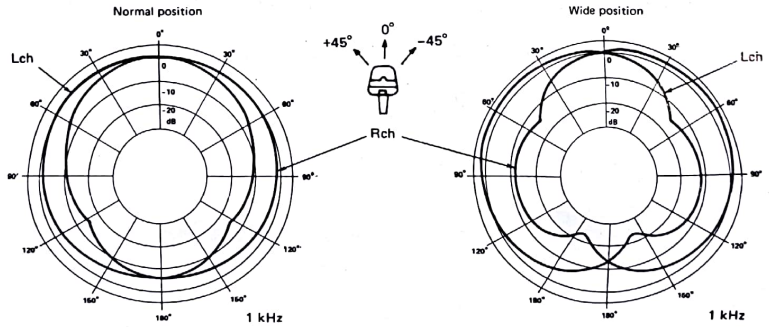

RADIO SHACK A DIVISION OF TANDY CORPORATION

U.S.A.: FORT WORTH, TEXAS 76102
CANADA: BARRIE, ONTARIO, L4M 4W5

TANDY CORPORATION

AUSTRALIA	BELGIUM	U K
280-316 VICTORIA ROAD	PARC INDUSTRIEL DE NANINNE	BILSTON ROAD
RYDALMERE, N S W. 2116	5140 NANINNE	WEDNESBURY, WEST MIDLANDS WS10 7JN

7AO

Printed in Japan

Scanned by CamScanner