
NUX


MINI PEDAL

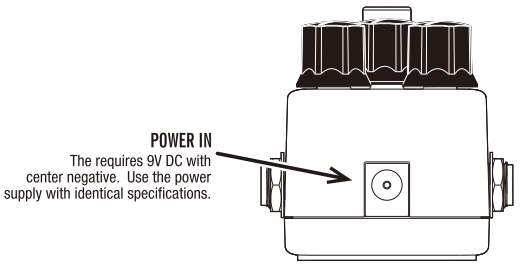


POWER IN
The requires 9V DC with center negative. Use the power supply with identical specifications.

Features

-Delivers that warm, natural tube overdrive sound.
-By rotating the knobs you can boost the guitar amp for colorful tone or overdrive itself for unique pedal sound.
-True bypass.
-LED indicator shows status of effect.

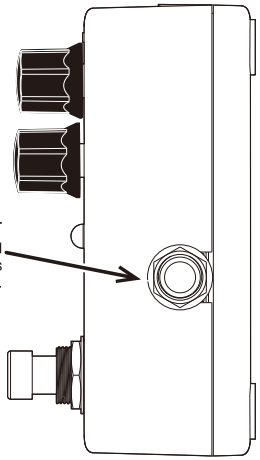

INPUT
Connect the INPUT of the pedal to your guitar or some other effects unit with a 1/4-inch mono phone plug.

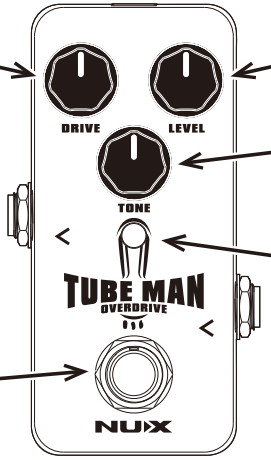


DRIVE KNOB
Control the amount of overdrive.

LEVEL KNOB
Control the level of the signal.

TONE KNOB
Control the amount of high frequency.

LED Indicator
Lights up when the pedal is enabled.

ON/OFF Switch
This foot switch is used to turn effect on/off.

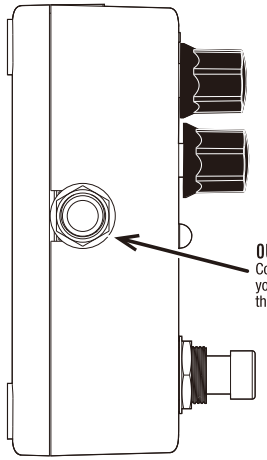

OUTPUT
Connect the OUTPUT of the pedal to your guitar amplifier or the Input of the other effects unit.

CE mark for European Harmonized Standards

CE Mark which is attached to our company's products of Battery mains the product is in fully conformity with the harmonized standard(s) EN 61000-6-3:2007+A1:2011 & EN 61000-6-1:2007 Under the Council Directive 2004/108/ EC on Electromagnetic Compatibility.

©2016 Cherub Technology-All rights reserved. No part of this publication may be reproduced in any form without prior written permission of Cherub Technology.

RoHS

Made in China
www.nuxefx.com

Specifications

Input impedance: 470K Ohms
Output impedance: 10K Ohms
Power: External AC adaptor delivering 9V DC regulated (⊕-(•)-⊖)


Weight: 174 g / 6 oz
Dimensions: 94(L) X 51(W) X 53(H) mm
/ 3.7(L)X2.0(W)X2.08(H) inches

*Specification may change without notice.

TUBE MAN OVERDRIVE

MODEL: NOD-2
Tube Man Overdrive


NUX
MINI PEDAL




交流适配器插口
交流转稳定直流的9伏适配器，需外正内负型。

产品特点

- 实现温暖、自然的电子管过载音效效果。
- 通过调节旋钮可以提升吉他放大器的音量或者使效果器的音色达到过载效果。
- 采用硬件无杂音开关踏板。
- LED灯指示效果器工作状态。
- 交流适配器供电。

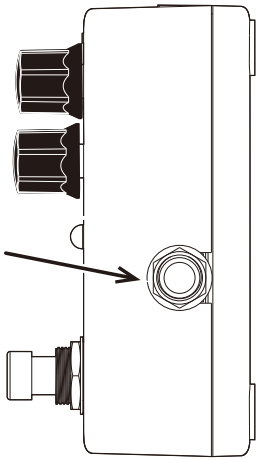

INPUT 输入插口
用6.35mm的单声道音频插头，使效果器的输入与电吉他或者其它的效果器建立连接。

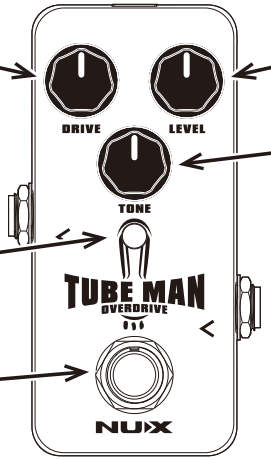


DRIVE 过载旋钮
顺时针旋转，增加失真度；逆时针旋转，可减少失真度。

LEVEL 音量旋钮
当效果器处在工作状态时，可通过此旋钮调节相应的效果音量。

TONE 音色旋钮
顺时针旋转，可使声音更加尖锐；逆时针旋转，可减少高频量，使声音更加缓和、圆润。

LED 指示灯
指示效果器状态。灯亮，表示效果开启；灯灭，表示直通状态。

效果激活踏板
(真直通)
激活效果器或切换到直通状态。

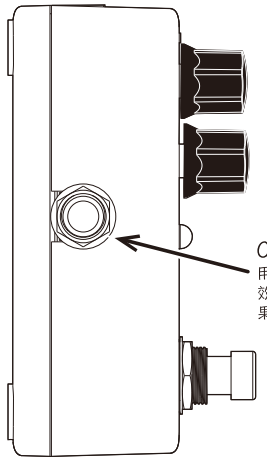

OUTPUT 输出插口
用6.35mm的单声道音频插头，使效果器的输出与音箱或者其它的效果器建立连接。

广东省珠海市高新区唐家湾镇科技九路10号
珠海市蔚科科技开发有限公司　售后服务部
邮编：519085　网址:www.nuxefx.com

技术规格

- 输入阻抗: 470千欧
- 输出阻抗: 10千欧
- 电源: 外接9V交流电源适配器 （⊖●⊕）

重量: 174克
体积: 94(L) X 51(W) X53(H) mm

*技术规格如有变更恕不另行通知。

TUBE MAN OVERDRIVE

型号: NOD-2
过载效果器