Specifications

Driver type	Dynamic
Type	Circumaural, Closed-Back
Driver Unit	50 mm, 25µ diaphragm, Neodymium magnet
Frequency response	10 Hz - 25 kHz
Impedance	32 Ω
Sensitivity	96 dB / 1 mW
Connector	Gold-plated ⅛" (3.5 mm) stereo mini connector with ⅛" (3.5 mm) to ¼" (6.3 mm) adapter
Cable	8.25' (2.5 m) long
Weight	10.75 oz (305 g)

Specifications subject to change without notice.

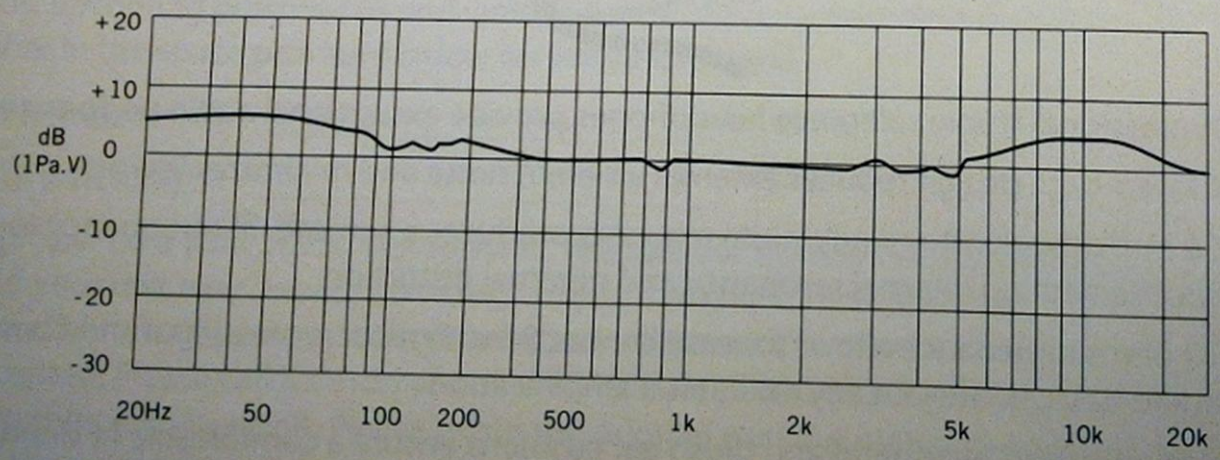

SR950 Frequency Response Curve