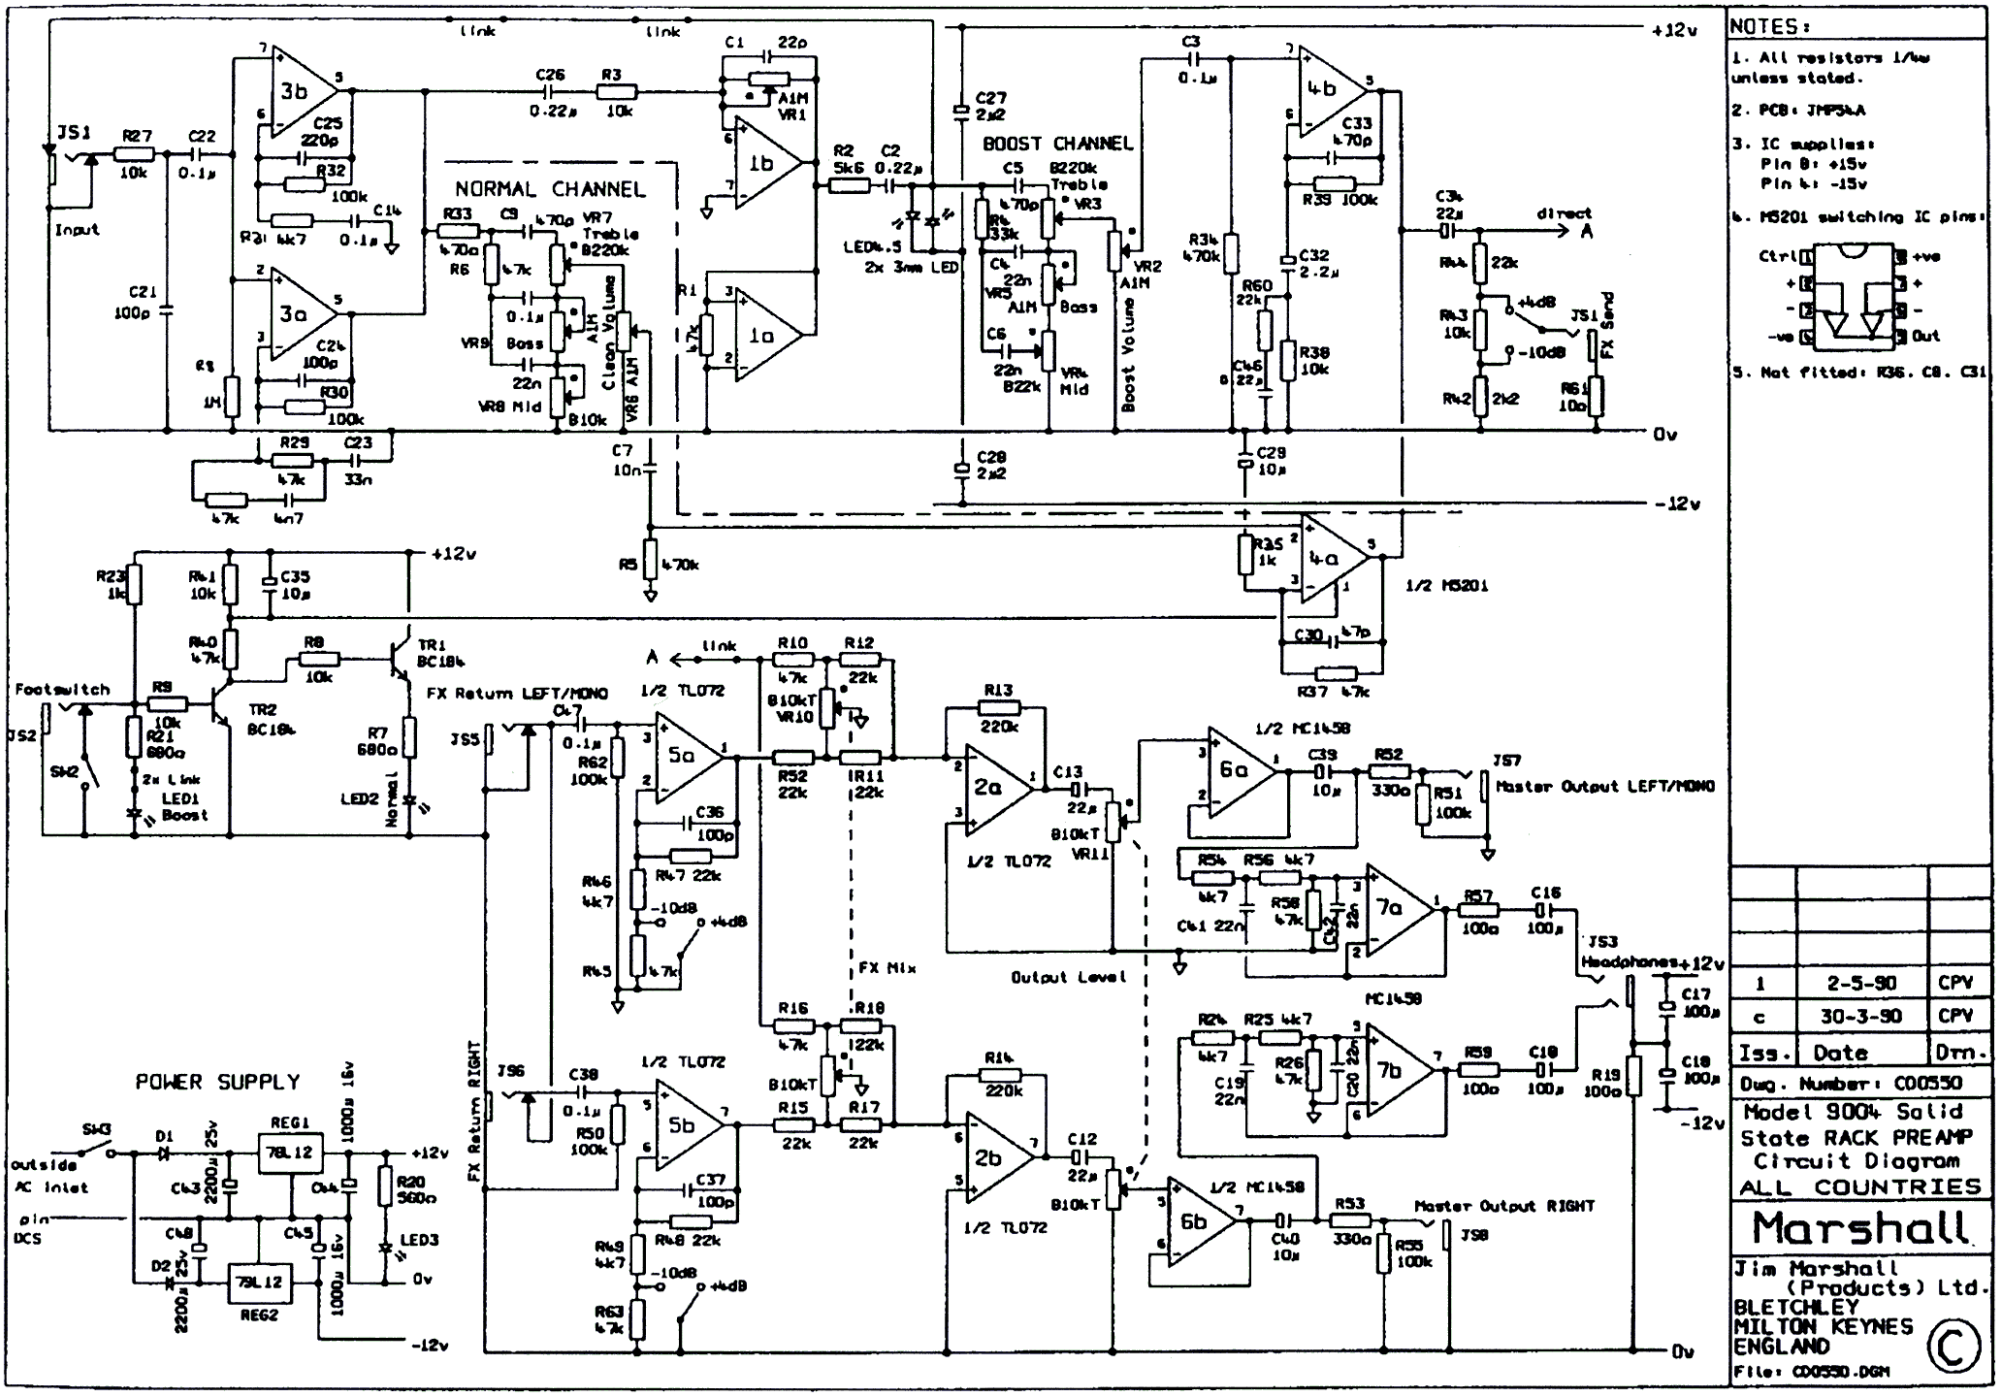

NOTES:
1. All resistors 1/4w unless stated.
2. PCB: JMP54A
3. IC supplies: Pin 8: +15v Pin 4: -15v
4. MS201 switching IC pins:
5. Not fitted: R36, C8, C31
NORMAL CHANNEL
BOOST CHANNEL
POWER SUPPLY
+12v
0v
-12v
1/2 MS201
1/2 TL072
MC1458
Footswitch
FX Return LEFT/MONO
FX Return RIGHT
FX Mix
Output Level
Master Output LEFT/MONO
Master Output RIGHT
Headphones
Boost Volume
Clean Volume
Treble
Bass
Mid
Boost
Normal
Input
direct
FX Send
outside AC inlet
pin DCS
Marshall
Jim Marshall (Products) Ltd.
BLETCHLEY
MILTON KEYNES
ENGLAND
File: CD0550.DGM
Iss. Date Drn.
1 2-5-90 CPV
c 30-3-90 CPV
Dwg. Number: CD0550
Model 9004 Solid State RACK PREAMP Circuit Diagram
ALL COUNTRIES