

TR-707/727 SERVICE NOTES

First Edition

SPECIFICATIONS

Memory Capacity	:	64 Rhythm Patterns (16 x 4 Group)
Track	:	4 (1 to 4; continuous Maximum measures=999)
Step	:	1 to 16 steps/measure
Tempo	:	♩ = 38 to 250
Rear Panel	:	Master Out (L,R/MONO) (8Vp-p, 1KΩ)
Trigger Out	:	+5V, 20ms Pulse TR-707 . . . . . Rim Shot TR-727 . . . . . Hi Agogo
Sync In/Out (5P DIN)	:	(1: Run/Stop, 2: GND, 3: Clock, 4: NC, 5: Continue)
Power Consumption	:	2.4 W
Dimensions	:	380 (W) x 73 (H) x 250 (D) mm 14-15/16" (W) x 2-7/8" (H) x 9-13/16" (D) in
Weight	:	1.5 kg/3 lb. 5 oz.
Accessories	:	12V AC Adaptor Connection Cord PJ-1
Options	:	Memory Cartridge M-64C Pedal Switch DP-2

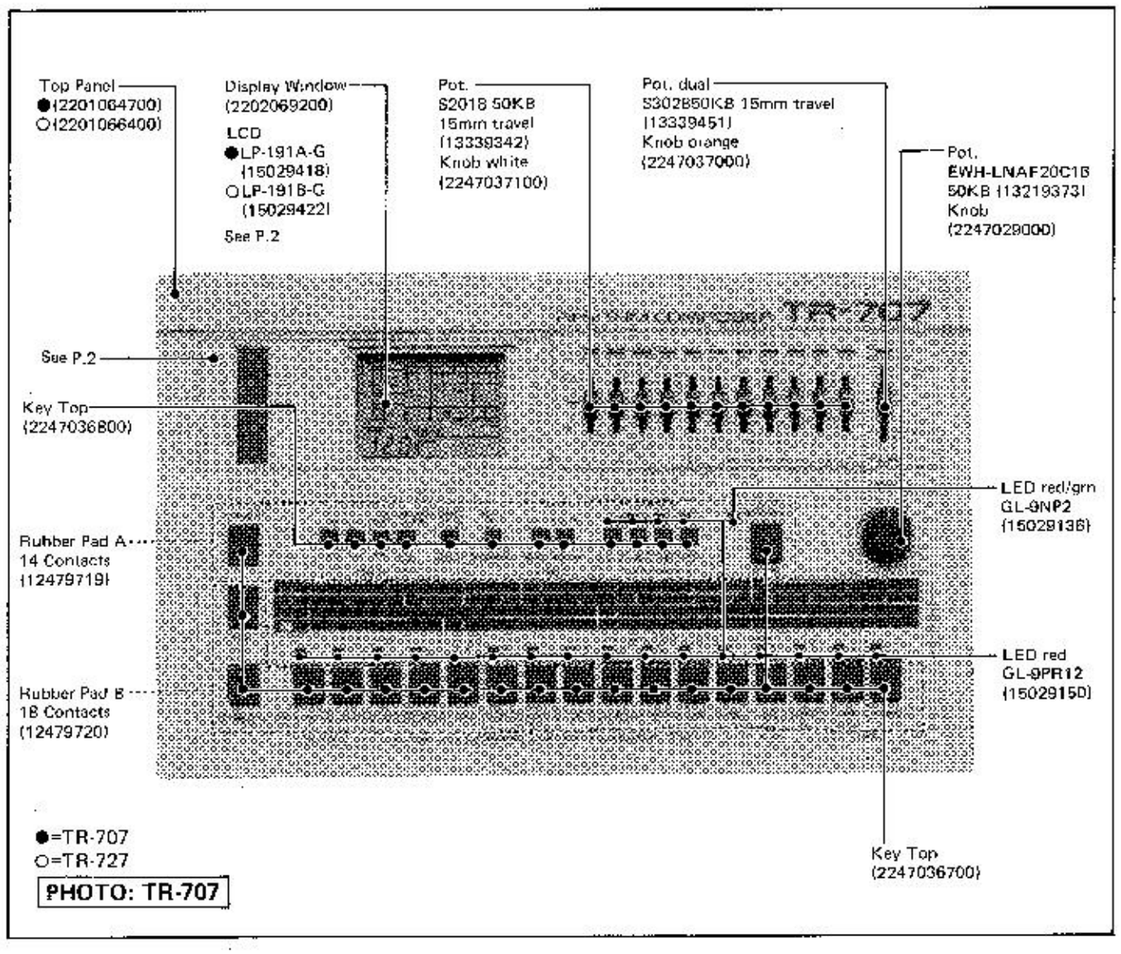

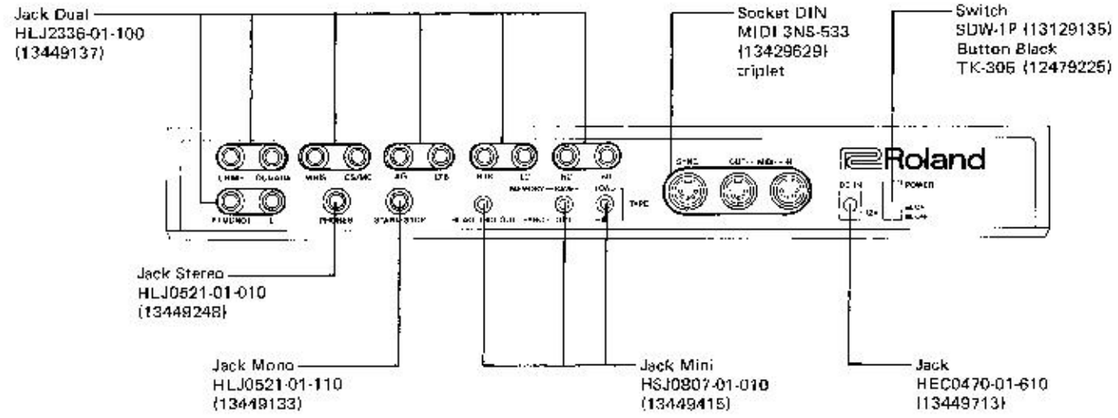

	TR-707	TR-727
Ⓐ	Voicing Board (7313604000) (pcb 2291098102)	Voicing Board (7313604000) (pcb 2292018900)
Ⓑ	Volume Board (7313605000) (pcb 2291098002)	Volume Board (7313805000) (pcb 2292019000)
Ⓒ	Switch Board (7313606000) (pcb 2291097903)	
Ⓓ	LCD Board (7313607000) (pcb 2291098203)	

