

TSB-1460A

Unidirectional Back Electret Condenser Microphone

TRANSOUND®

Specifications




|                             |                   |
|-----------------------------|-------------------|
| Sensitivity:                | -50+/-4dB         |
| 1kHz,0dB=1V/Pa              | Vs=1.5V RL=2.2kΩ  |
| Impedance:                  | Less than 2.2 kΩ  |
| Directivity:                | Unidirectional    |
| Standard Operating Voltage: | 1.5               |
| Current Draw:               | Max. 0.5mA        |
| Sensitivity Reduction:      | 120dB SPL         |
| Signal to Noise Ratio:      | Greater than 66dB |


| Qty     | Price  |
|---------|--------|
| 1-9     | \$4.89 |
| 10-99   | \$4.00 |
| 100-999 | \$3.20 |

Input **Quantity** to order - 1


[ADD TO CART](#) [VIEW CART](#)

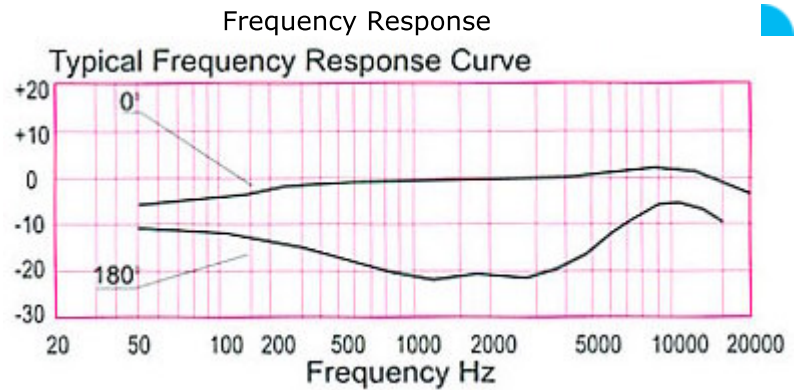

Schematic

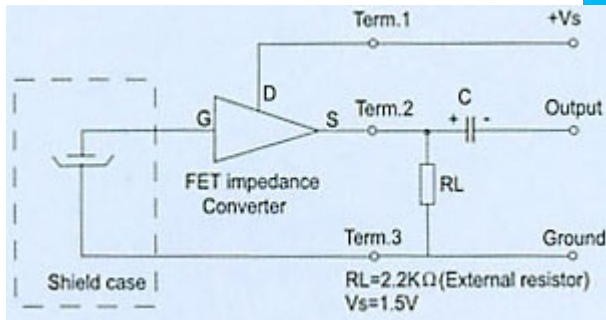

Dimensions

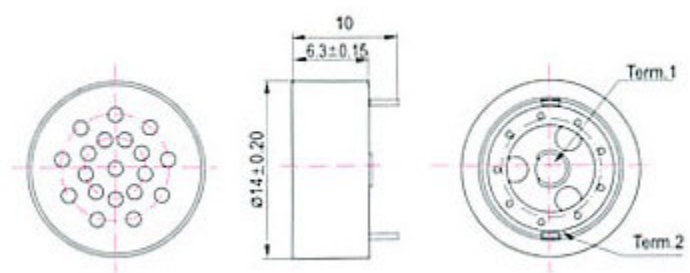

[Inquire Here](#)