Replacing the Housing for the EtherCon Connector

Follow the steps described below to replace the housing (the cylindrical outer case) for the EtherCon connector.

1. **Turn the bushing in the direction shown in the figure.**

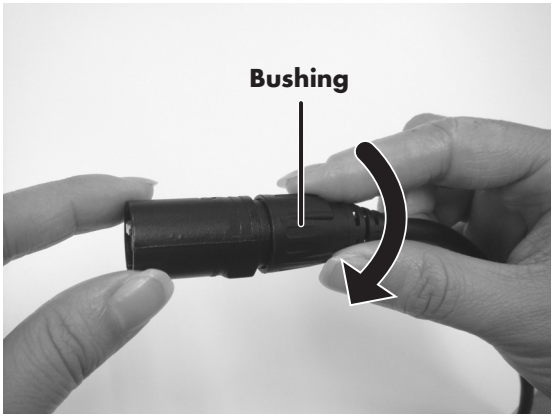

2. **Detach the bushing.**

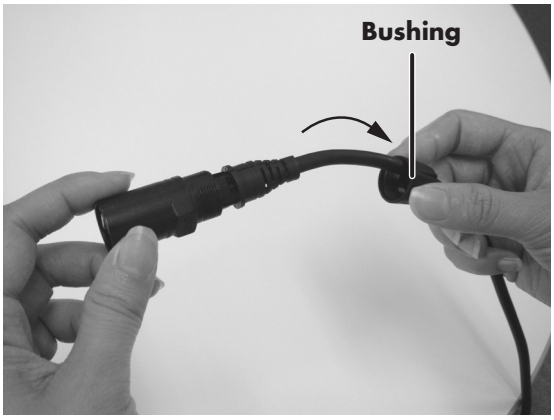

3. **Pull out the modular plug (RJ45) from the housing.**

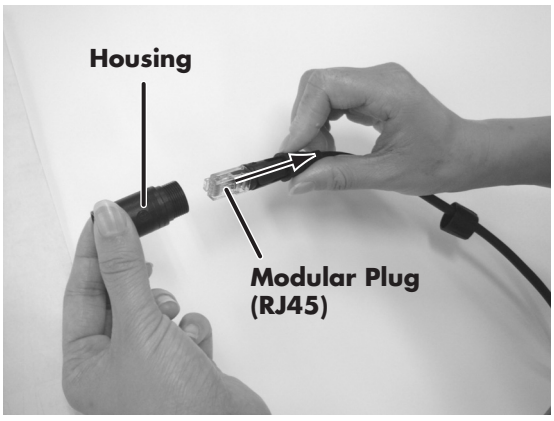

4. **Orient the new housing and the modular plug (RJ45).**

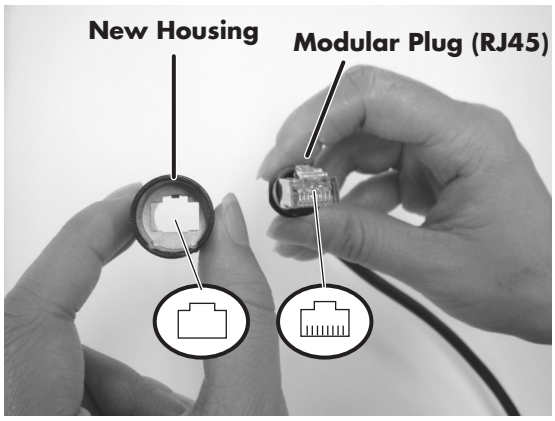

5. **Fit the modular plug (RJ45) into the new housing.**

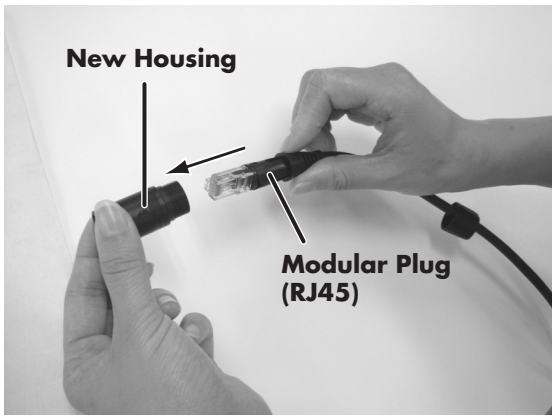

6. **Reattach the bushing, turning it in the direction shown in the figure to secure it in place.**

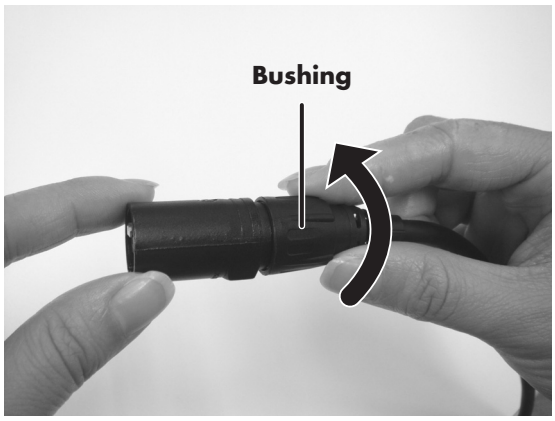

イーサコン・コネクターのハウジングを交換する

イーサコン・コネクターのハウジング（外側の筒）を以下の手順に従って交換します。

1. ブッシングを図の方向に回します。

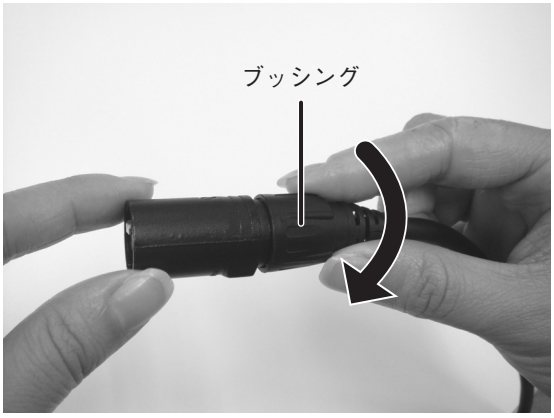

2. ブッシングをはずします。

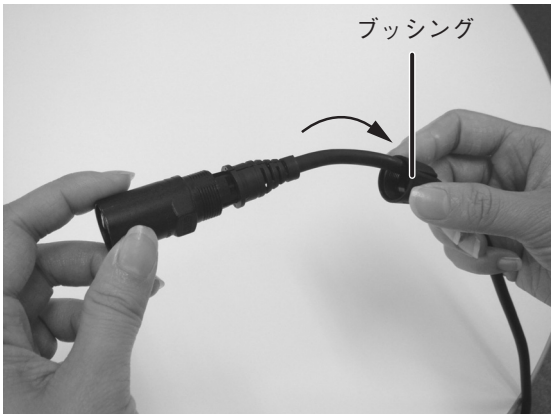

3. ハウジングからモジュラー・プラグ（RJ45）を引き抜きます。

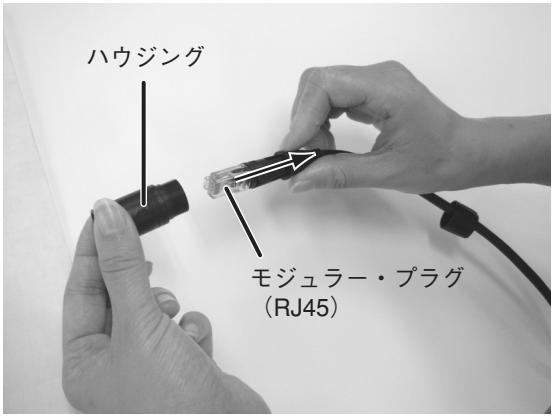

4. 新しいハウジングの向きと、モジュラー・プラグ（RJ45）の向きを合わせます。

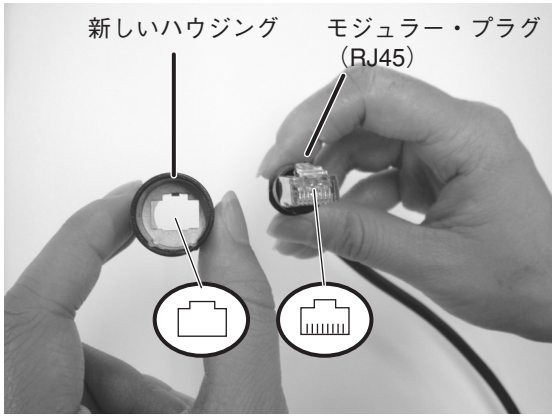

5. 新しいハウジングに、モジュラー・プラグ（RJ45）を収めます。

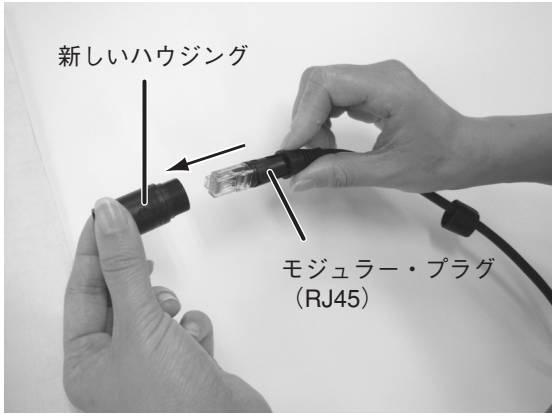

6. ブッシングを元に戻し、図の方向に回して固定します。

