
CS70M OVERALL TROUBLE SHOOTING DIAGRAM (ANALOG SECTION) 006485

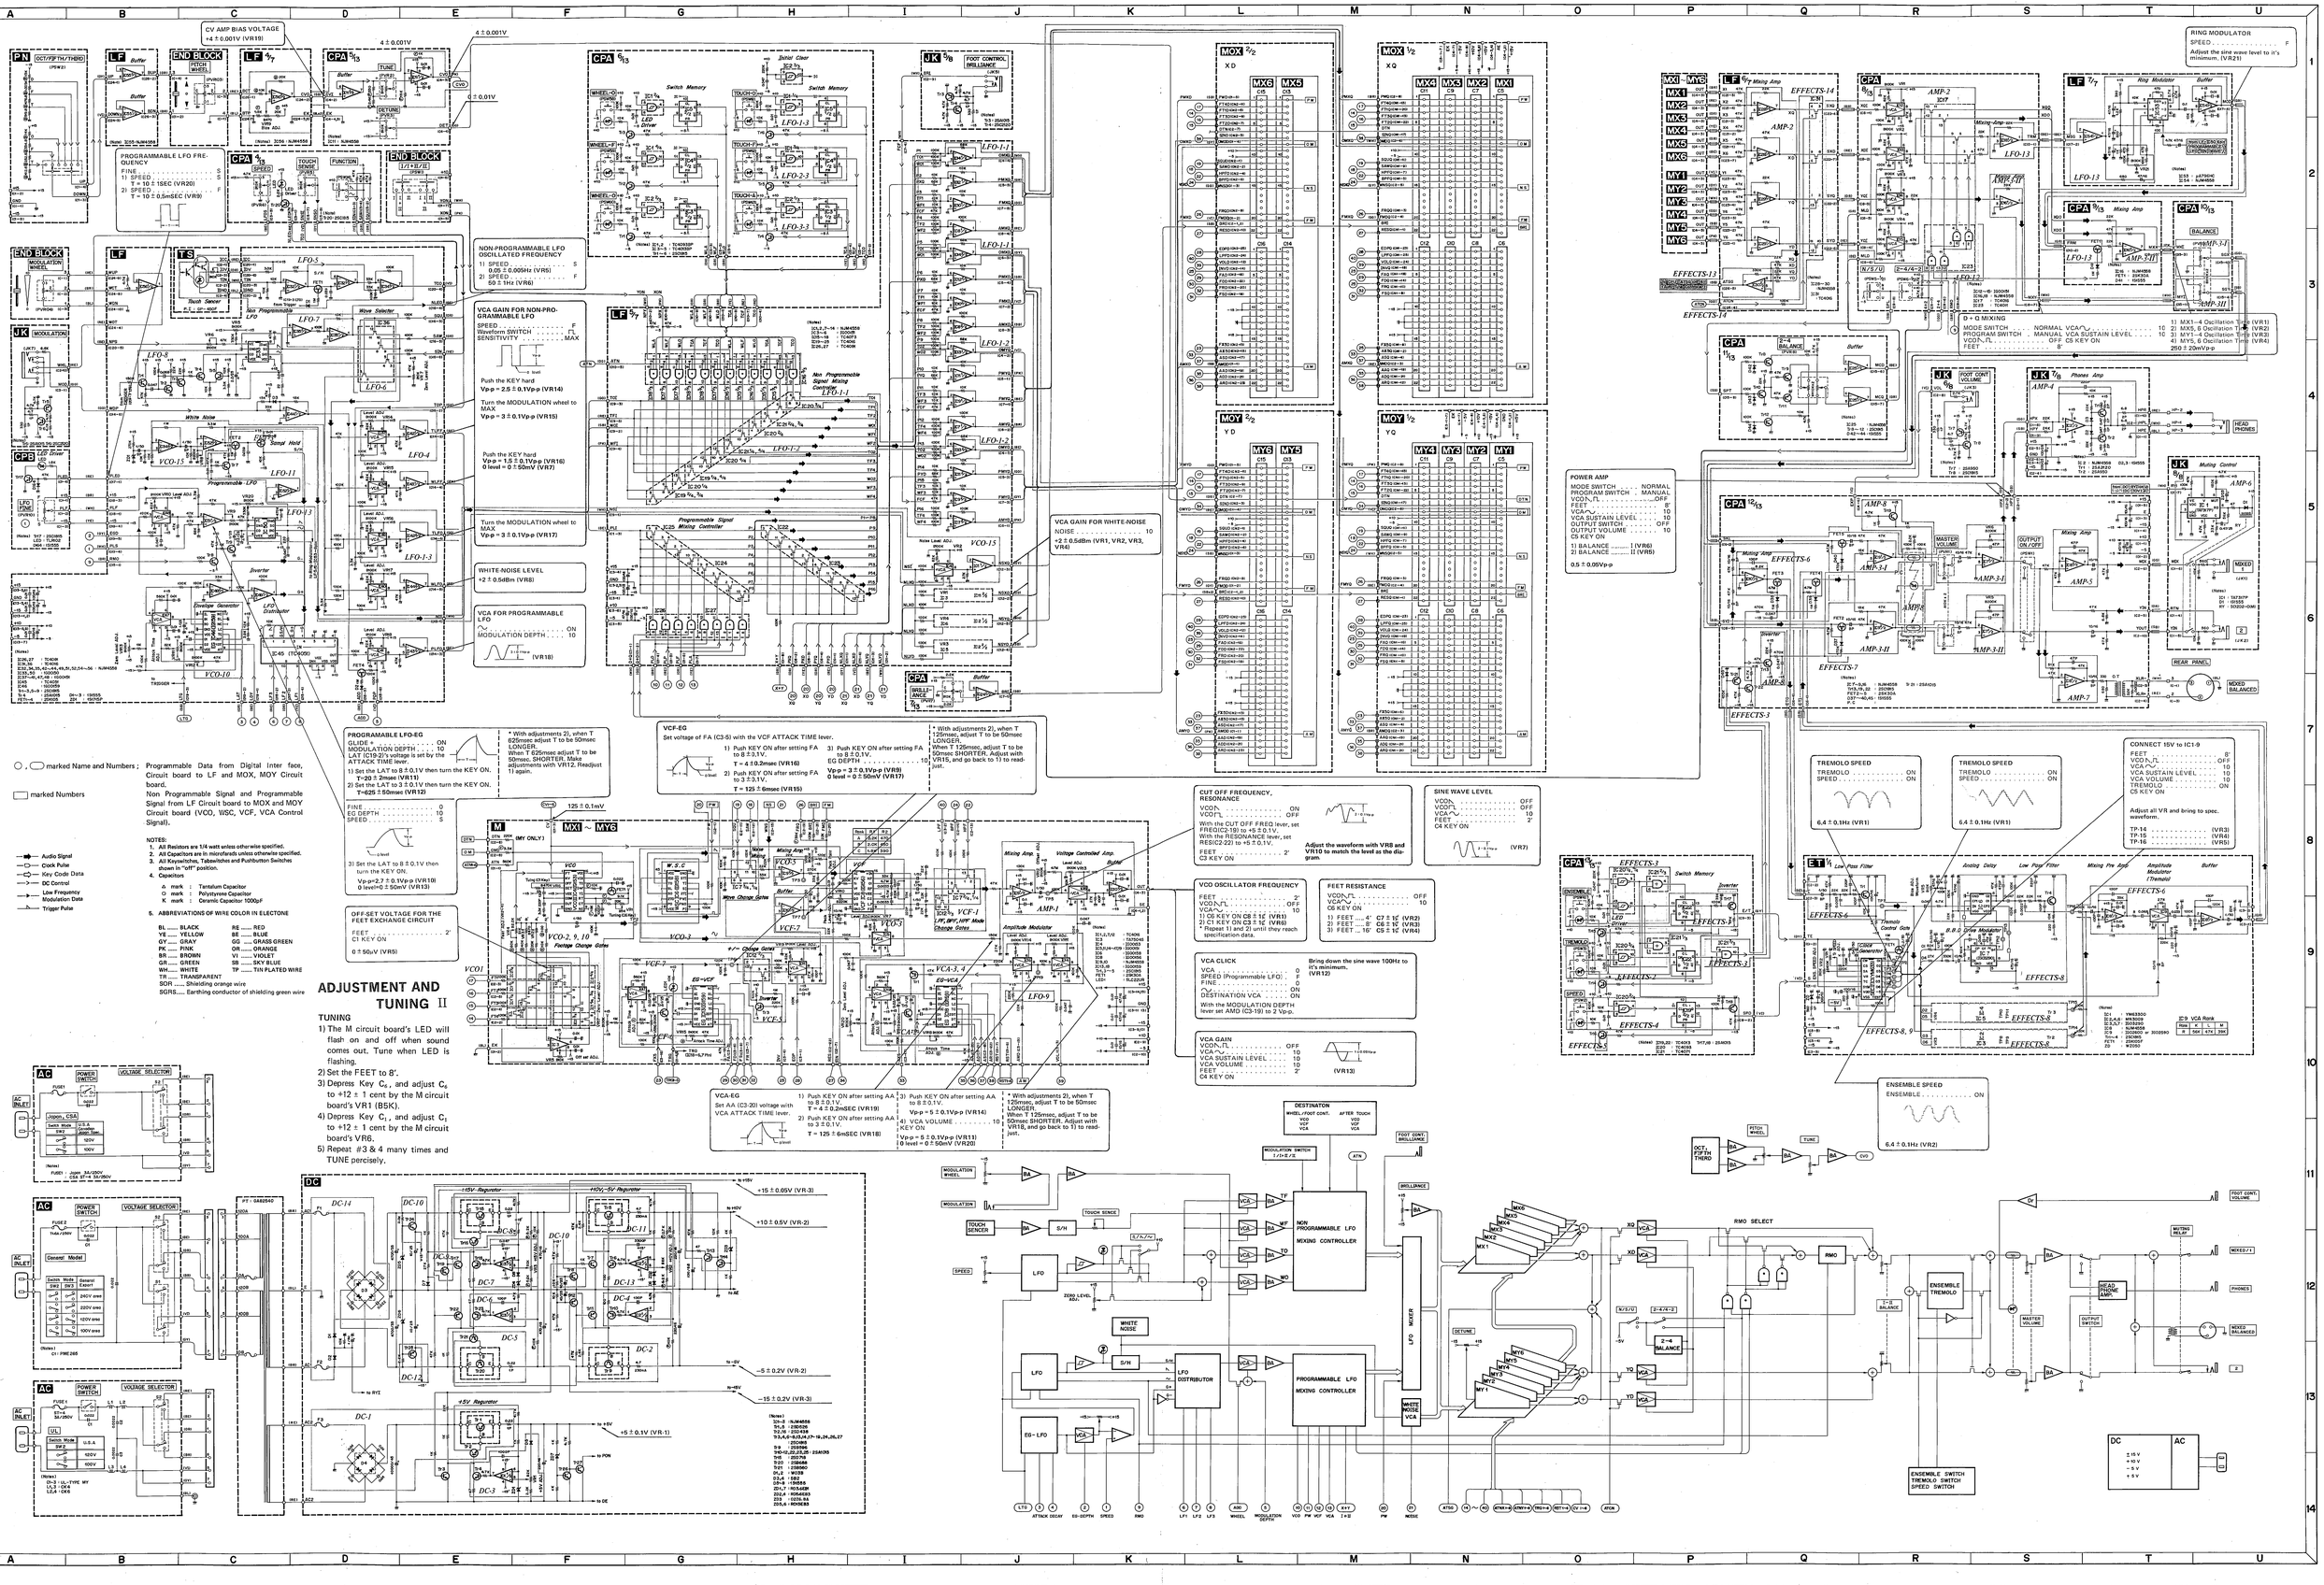

○ , ⬭ marked Name and Numbers ; Programmable Data from Digital Inter face, Circuit board to LF and MOX, MOY Circuit board.

▭ marked Numbers


Non Programmable Signal and Programmable Signal from LF Circuit board to MOX and MOY Circuit board (VCO, WSC, VCF, VCA Control Signal).

Audio Signal
Clock Pulse
Key Code Data
DC Control
Low Frequency Modulation Data
Trigger Pulse

NOTES:
1. All Resistors are 1/4 watt unless other wise specified.
2. All Capacitors are in microfarads unless otherwise specified.
3. All Keyswitches, Tabswitches and Pushbutton Switches shown in "off" position.
4. Capacitors
   △ mark : Tantalum Capacitor
   ○ mark : Polystyrene Capacitor
   K mark : Ceramic Capacitor 1000pF
5. ABBREVIATIONS OF WIRE COLOR IN ELECTONE

BL	BLACK	RE	RED
YE	YELLOW	BE	BLUE
GY	GRAY	GG	GRASS GREEN
PK	PINK	OR	ORANGE
BR	BROWN	VI	VIOLET
GR	GREEN	SB	SKY BLUE
WH	WHITE	TP	TIN PLATED WIRE
TR	TRANSPARENT		
SGR	Shielding orange wire		
SGRS	Earthing conductor of shielding green wire		

CS70M OVERALL TROUBLE SHOOTING DIAGRAM (DIGITAL SECTION) 006485

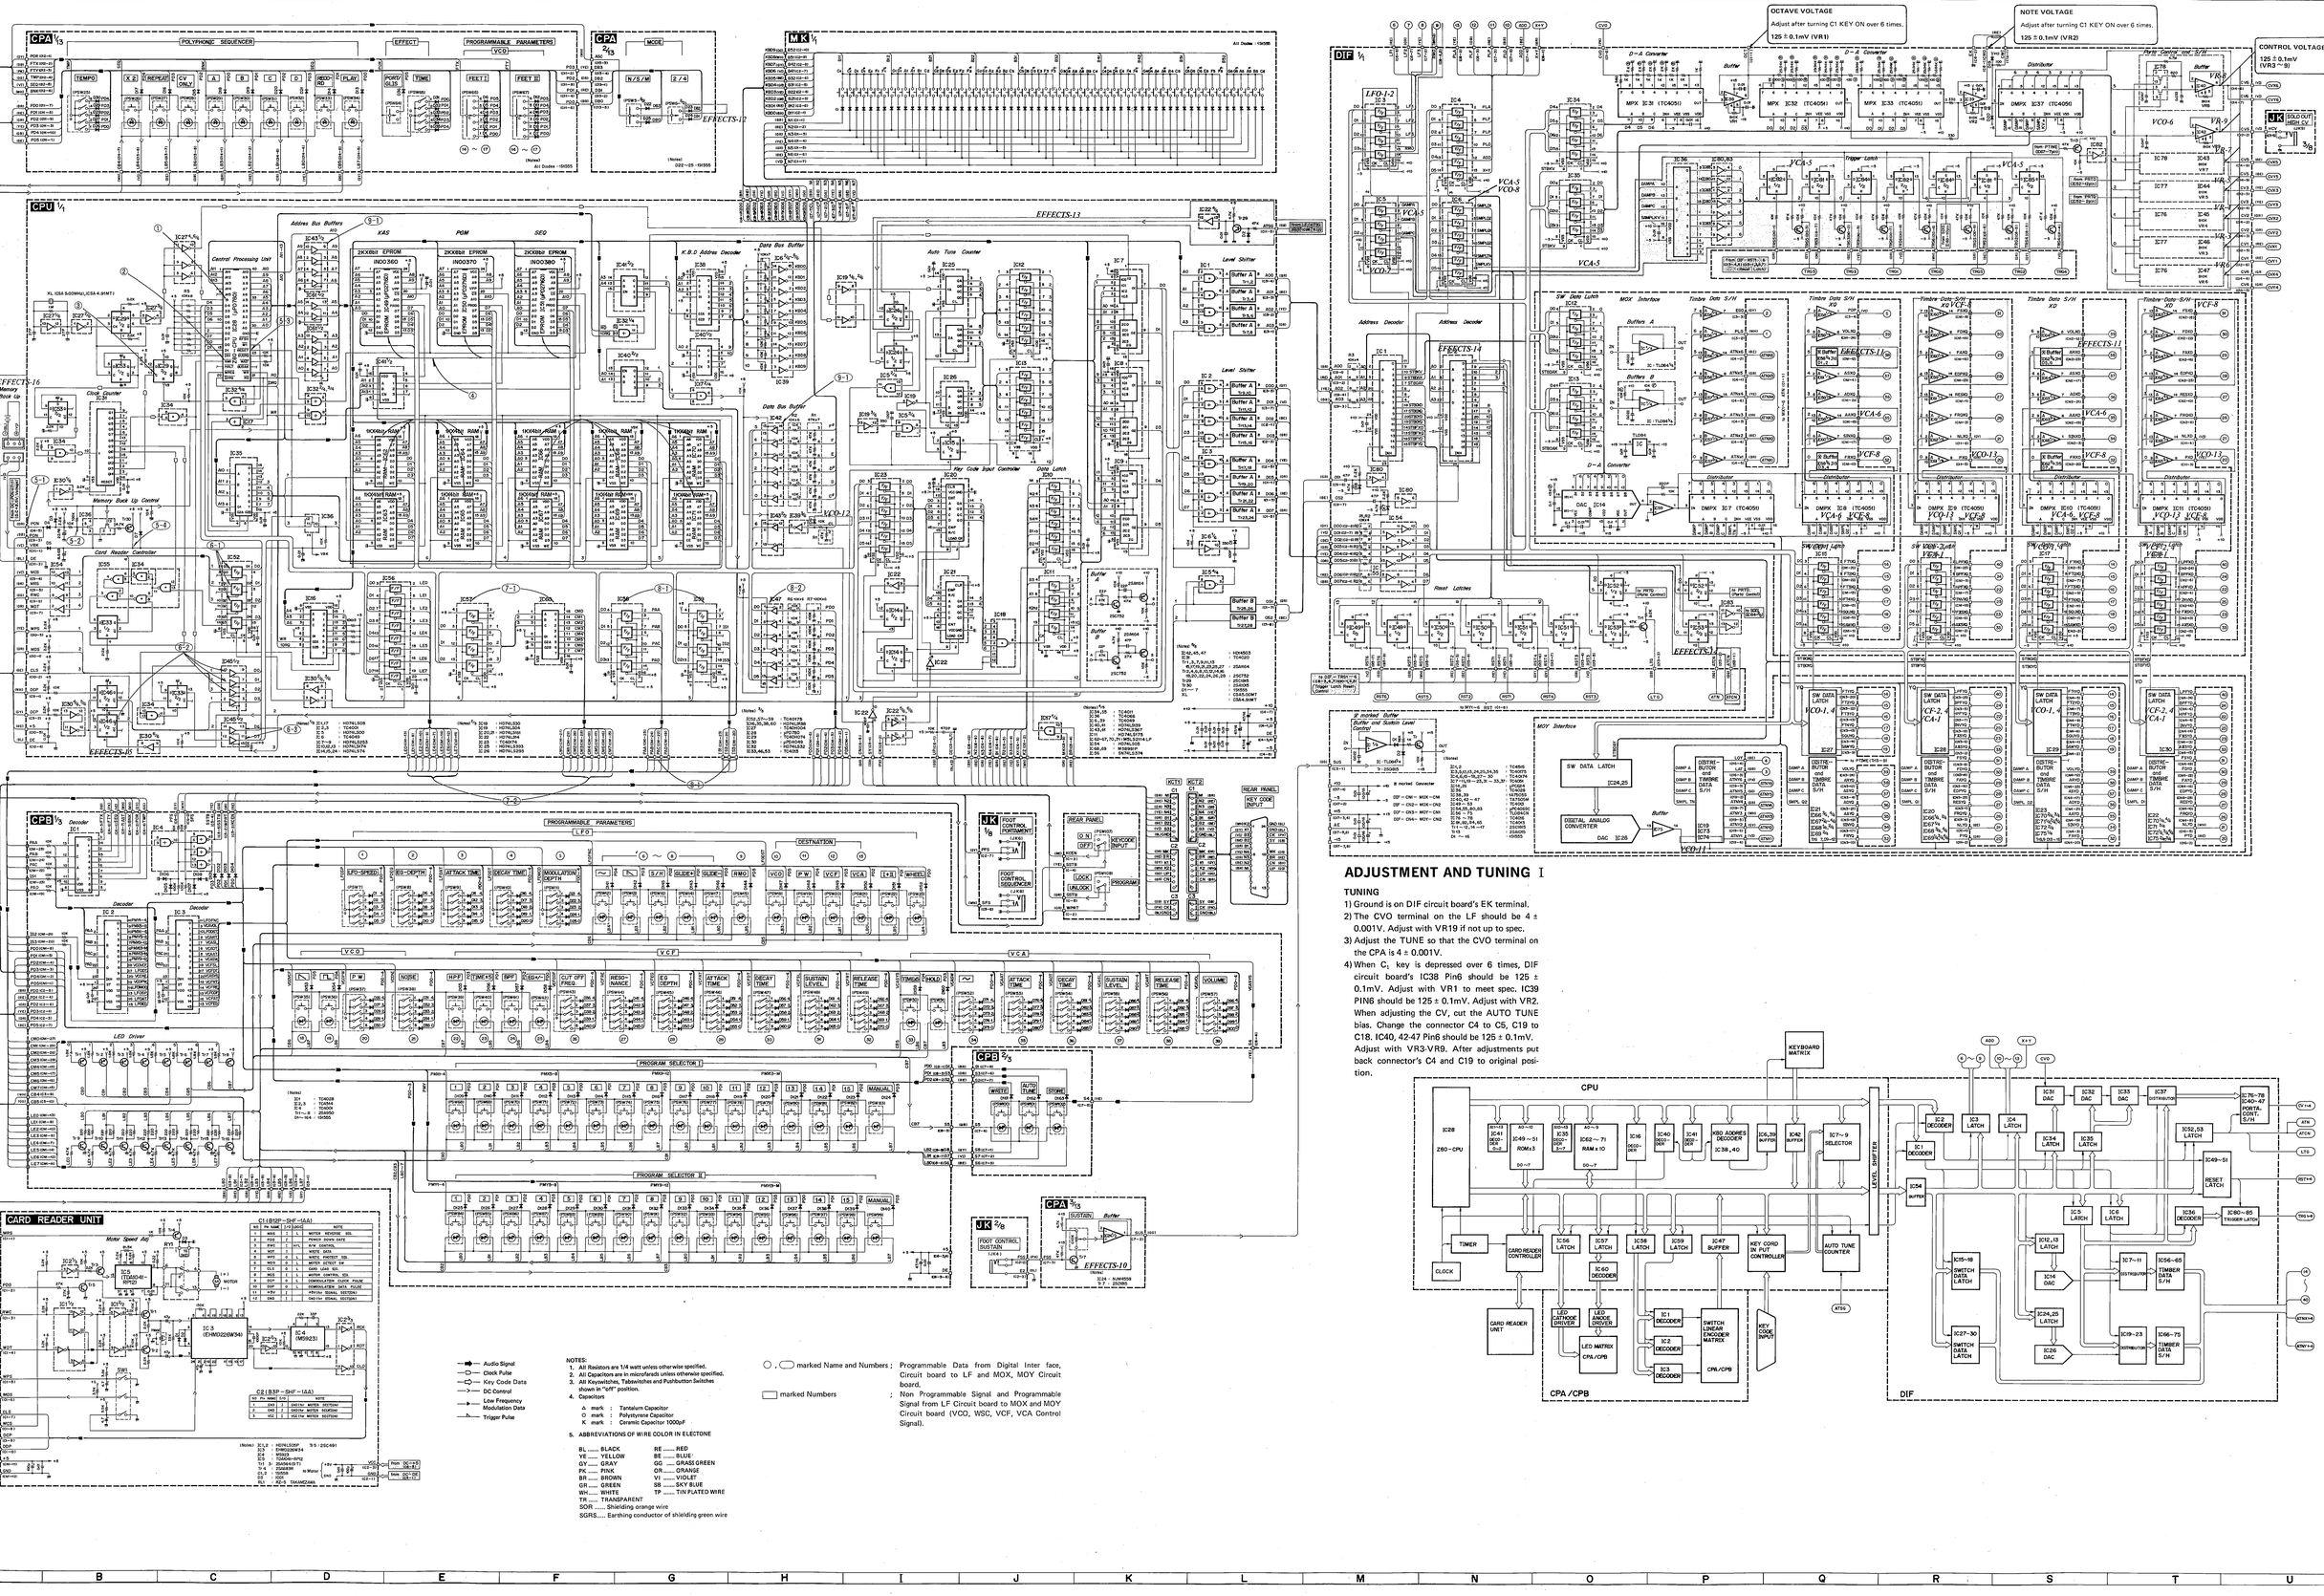

NOTES:
1. All Resistors are 1/4 watt unless otherwise specified.
2. All Capacitors are in microfarads unless otherwise specified.
3. All Keyswitches, Tabswitches and Pushbutton Switches shown in "off" position.
4. Capacitors
   - △ mark : Tantalum Capacitor
   - ○ mark : Polystyrene Capacitor
   - K mark : Ceramic Capacitor 1000pF
5. ABBREVIATIONS OF WIRE COLOR IN ELECTONE

BL	BLACK	RE	RED
YE	YELLOW	BE	BLUE
GY	GRAY	GG	GRASS GREEN
PK	PINK	OR	ORANGE
BR	BROWN	VI	VIOLET
GR	GREEN	SB	SKY BLUE
WH	WHITE	TP	TIN PLATED WIRE
TR	TRANSPARENT		

SOR ..... Shielding orange wire
SGRS .... Earthing conductor of shielding green wire