MODE MACHINES®

www.modemachines.com

MM-5 DELAY

Precautions

PLEASE READ CAREFULLY BEFORE PROCEEDING

Powers upply

Please connect the designated AC adapter to an AC outlet of the correct voltage .

Please be sure to use only an AC adapter which supplies 9V(+/-10%)DC.center minus .The maximum working voltage not exceed 12V.otherwise may be dangerous equipment damage.fire or other problems.

Unplug the AC power adapter when not using or during electrical storms.

Connections

Always turn off the power of this and all other equipment before connecting or disconnecting ,this will help prevent malfunction and / or damage to other devices.

Also make sure to disconnect all connection cables and the power cord before moving this unit.

Handling

Do not apply excessive force to the switches or controls.

Do not let paper,metallic,or other objects into this unit.

Take care not to drop the unit,and do not subject it to shock or excessive pressure.

Cleaning

Clean only with a soft,dry cloth. If necessary ,slightly moisten the cloth.

Do not use abrasive cleanser,cleaning alcohol ,paint thinners,wax,solvents. Cleaning fluids,or chemical-impregnated wiping cloths.

Interferencew ith o there lectrical devices

Radios and televisions placed nearby may experience reception interference. Operate this unit at a suitable distance from radios and televisions.

Location

To avoid deformation,discoloration,or other serious damage,do not expose this unit to the following conditions;

.Direct sunlight
.Magnetic fields
.Excessive dusty or dirty location
.Strong vibration or shocks
.Heat sources
.Extreme temperature or humidity
.High humidity or moisture

Mainfeatures

.Very similar to analog delay, Warm, vintage delay sound
.Full metal shell
.Very small and exquisite
.True bypass
.DC 9V Adapter power supply

Panelinstruction

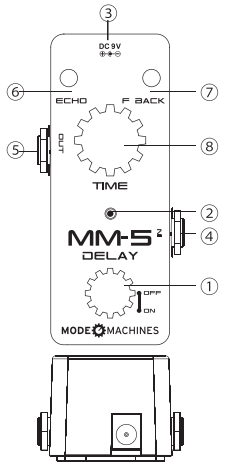

1. On/Off Switch:
Change the status of the effects from Off to On.

2.ON/OFFL ED:
Instructs effects or bypass status of M5, when the LED is lit up, the effects is on

3.DCI NP owerJ ack:
For power supply, use a 9-volt DC regulated AC adapter(plug polarity is positive on the barrel and negative in the center)

4.INPUTJ ack:
1/4" mono audio jack. For connecting guitar

5.OUTPUTJ ack:
1/4" mono audio jack, outputs the signal

6.ECHOK nob:
Adjust the level of delay effects

7.F.BACKK nob:
Adjust the feedback of delay effects.

8.TIMEK nob:
Adjust the delay time

Specifications

Delay Time: 25mx-600mx
Input: 1/4" monaural jack (impedance: 470k Ohms)
Output: 1/4" monaural jack (impedance: 470 Ohms)
Power Requirements: AC adapter. 9V DC (center minus plug)
Current Draw: 40mA
Dimension: 46（W）*94（D）*50（H）mm
Accessories: Ower's Manual

MODE MACHINES®

www.modemachines.com

Disclaimer: Any specification's update won't be amended in this manual