audio-technica. **Pro Series**

PRO 35x Cardioid Condenser Instrument Microphone



- Ideal for woodwinds, brass, strings, piano, snare and toms
- Handles high-intensity sound without distortion
- Perfect for active stage performances
- UniMount® clip permits accurate positioning while protecting element
- 5.9' (1.8 m) cable permanently attached to mic, screw terminals at power module
- Also available as:
  PRO 35xcW -- less power module; 55" (1.4 m) cable terminated with locking 4-pin connector for A-T UniPak™ wireless systems

PRO 35x Specifications

Element
Condenser

Polar Pattern
Cardioid

Frequency Response
50 - 17,000 Hz

Open Circuit Sensitivity
-54 dB (1.9 mV) re 1V at 1 Pa

Impedance
200 ohms

Maximum Input Sound Level
149 dB SPL, 1 kHz at 1% T.H.D.

Signal to Noise Ratio
60 dB, 1 kHz at 1 Pa

Dynamic Range (Typical)
115 dB, 1 kHz at Max. SPL

Phantom Power Requirements
9 - 52V, 2 mA typical

Switch
Flat/low-roll-off


Low Frequency Roll-off
150 Hz, 6 dB per octave

Weight
0.25 oz (7 g)

Power Module
In-line

Output Connector
XLRM-type (power module)

Accessories Furnished: AT8418 UniMount® instrument mount; AT8533x power module

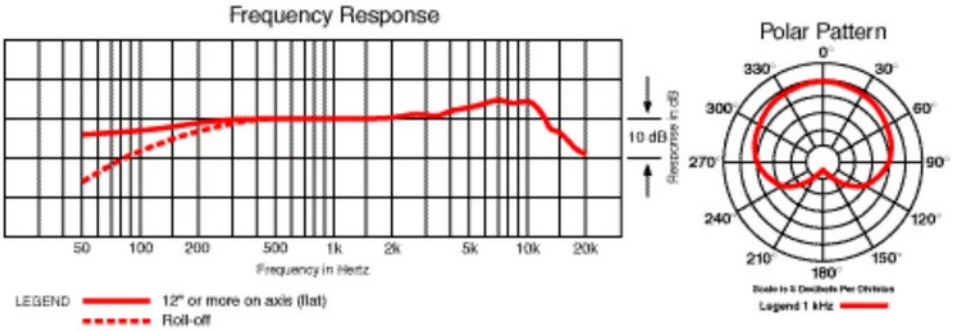

Conditions and Warranty

AT1234...
home site map alphanumeric product list glossary

© 2002 Audio-Technica U.S., Inc.